



ANIXTER/WESCO GLOBAL ACCOUNTS MEETING

# POWER GENERATION SOLUTIONS

SOUTHWIRE × ANIXTER/WESCO


ACCELERATING TIME TO POWER™

OCTOBER 6, 2026

Stephan Hardt · Power Generation Solutions  
[stephan.hardt@southwire.com](mailto:stephan.hardt@southwire.com)

Confidential · Do not distribute

© 2026 Southwire Company, LLC. All rights reserved.

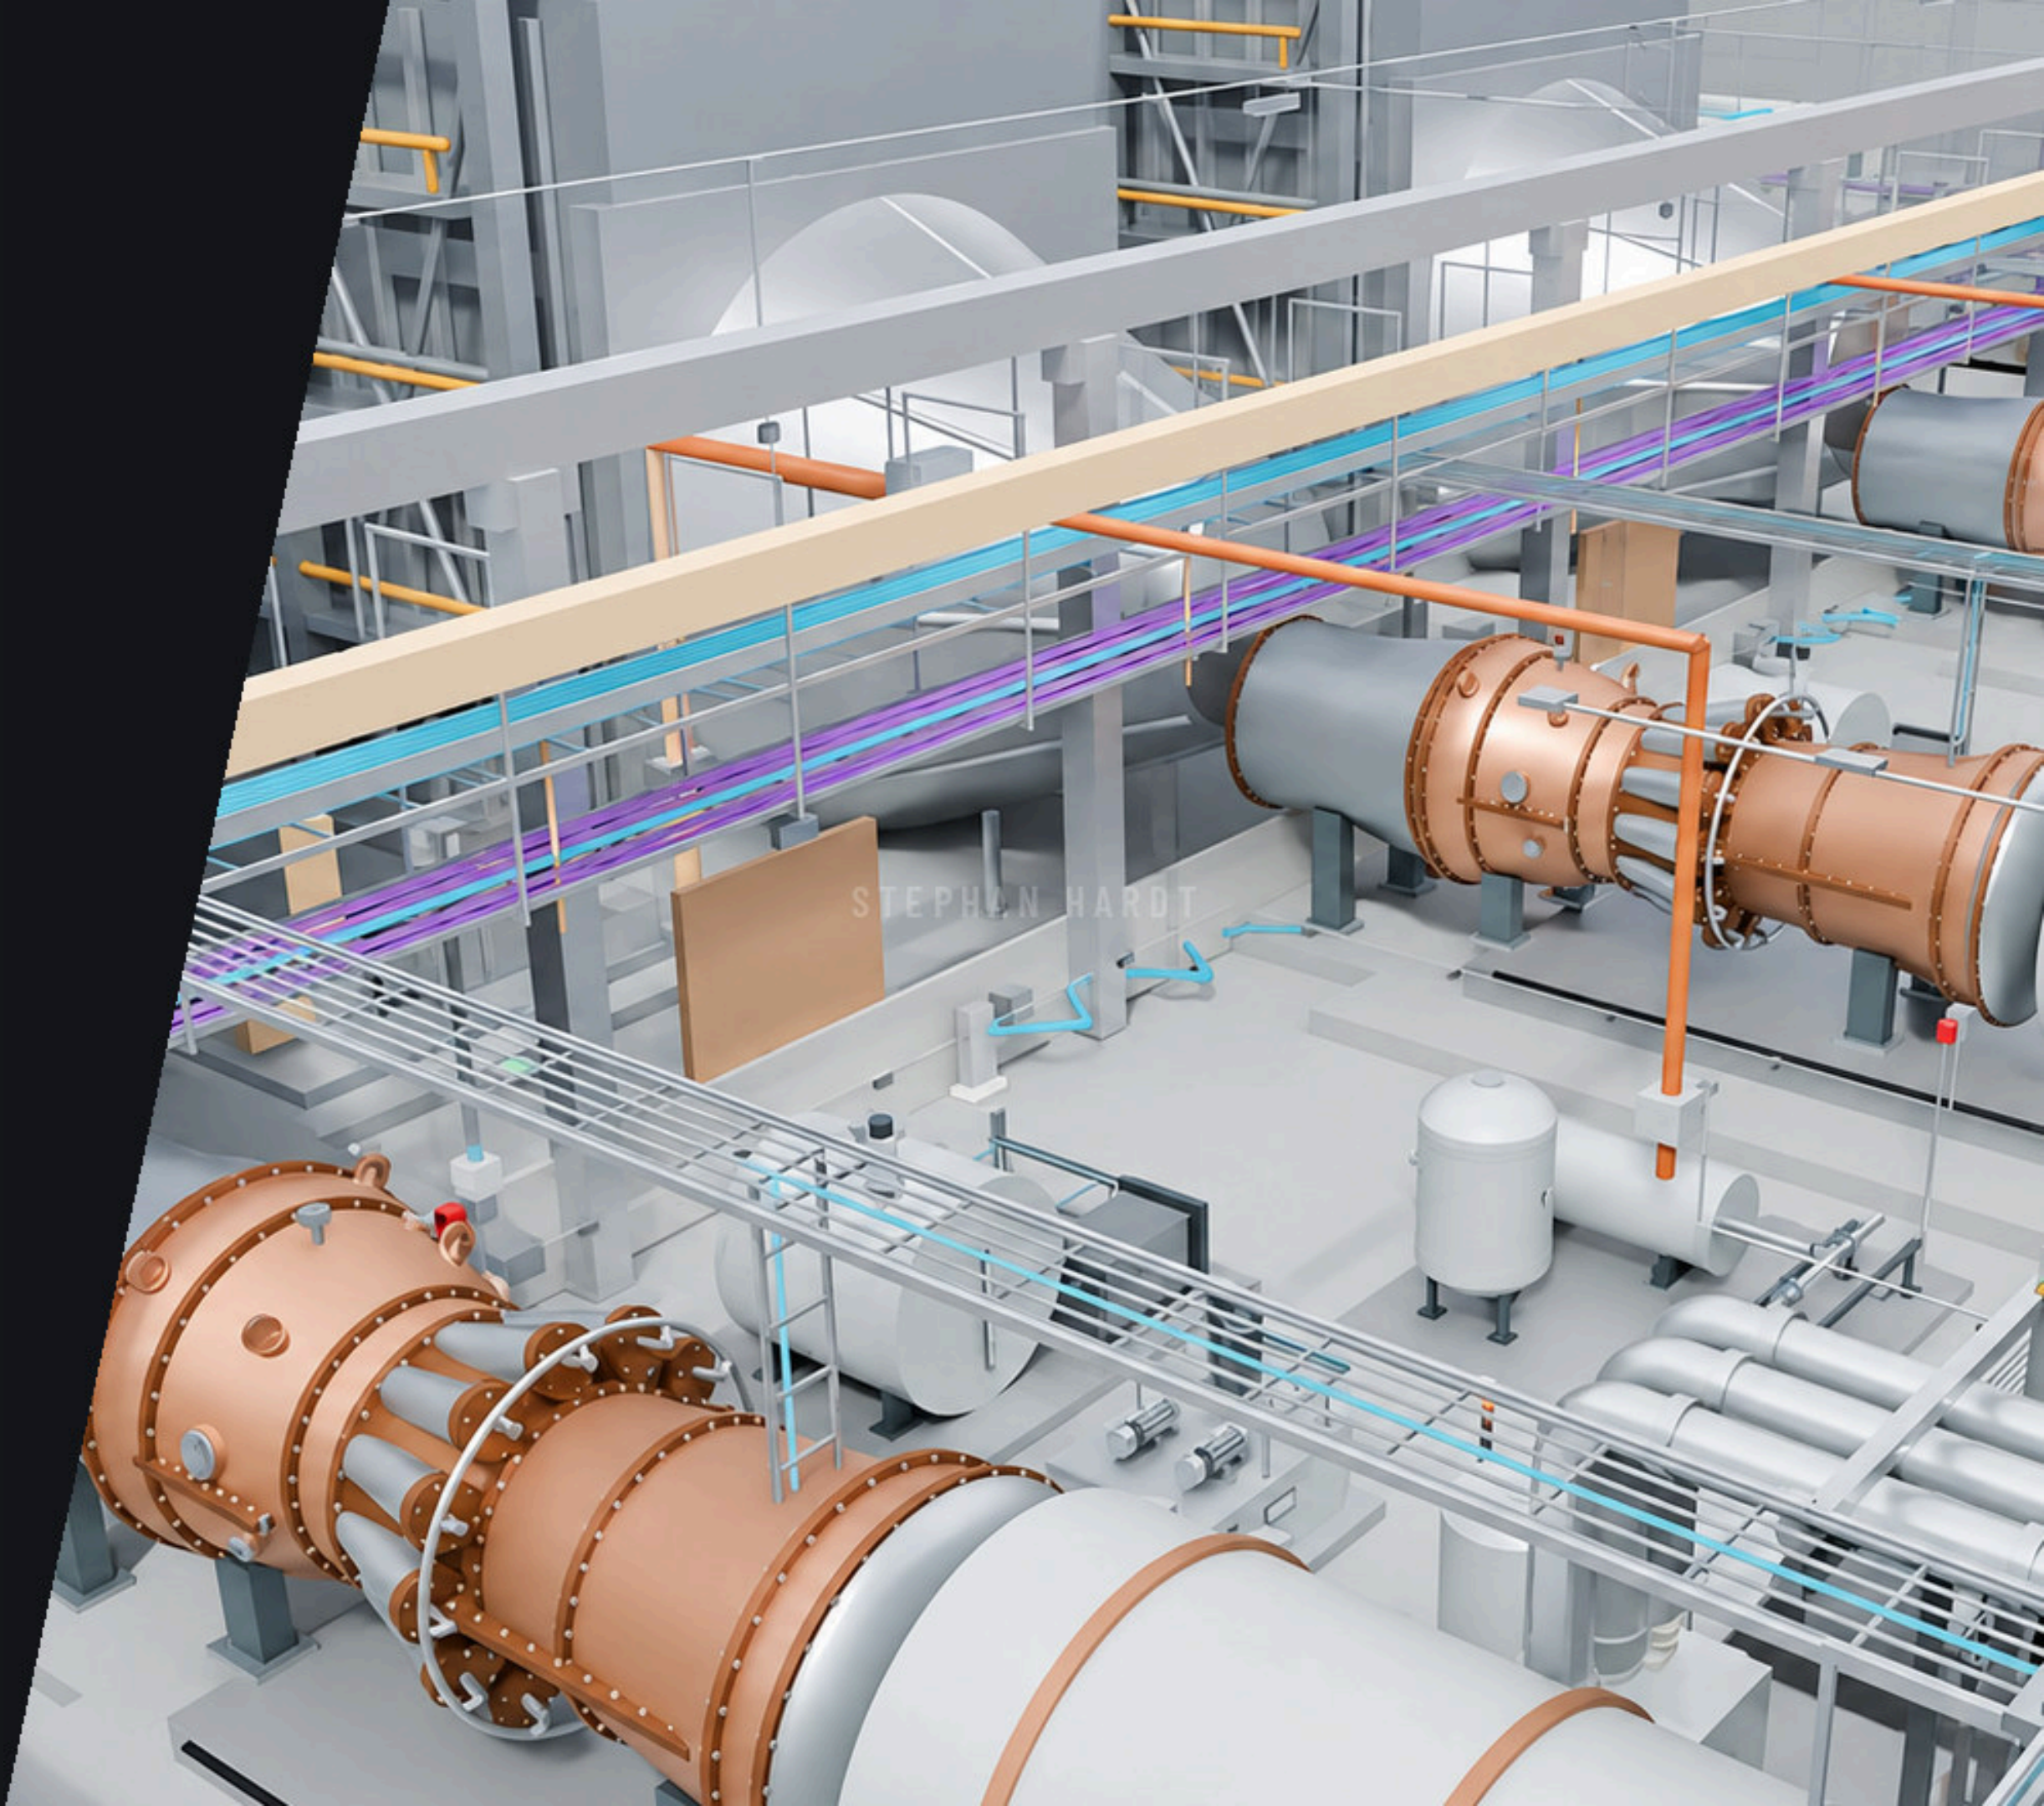



## MEETING OBJECTIVE

# LEAVE TODAY WITH A JOINT-ACCOUNT WORKING MODEL

**01**

## BUSINESS UPDATE

Market, OEM order books, the cable opportunity and Southwire progress

**02**

## GAS POWER SOLUTIONS

One plant-wide cable scope, from combined cycle to modular packages


**03**

## WINNING TOGETHER

Package builders and OEMs we both call on, and three decisions for today

THE OPPORTUNITY AT A GLANCE

# A BOOM-SCALE GAS BUILD, AND **CABLE IS ON THE CRITICAL PATH**

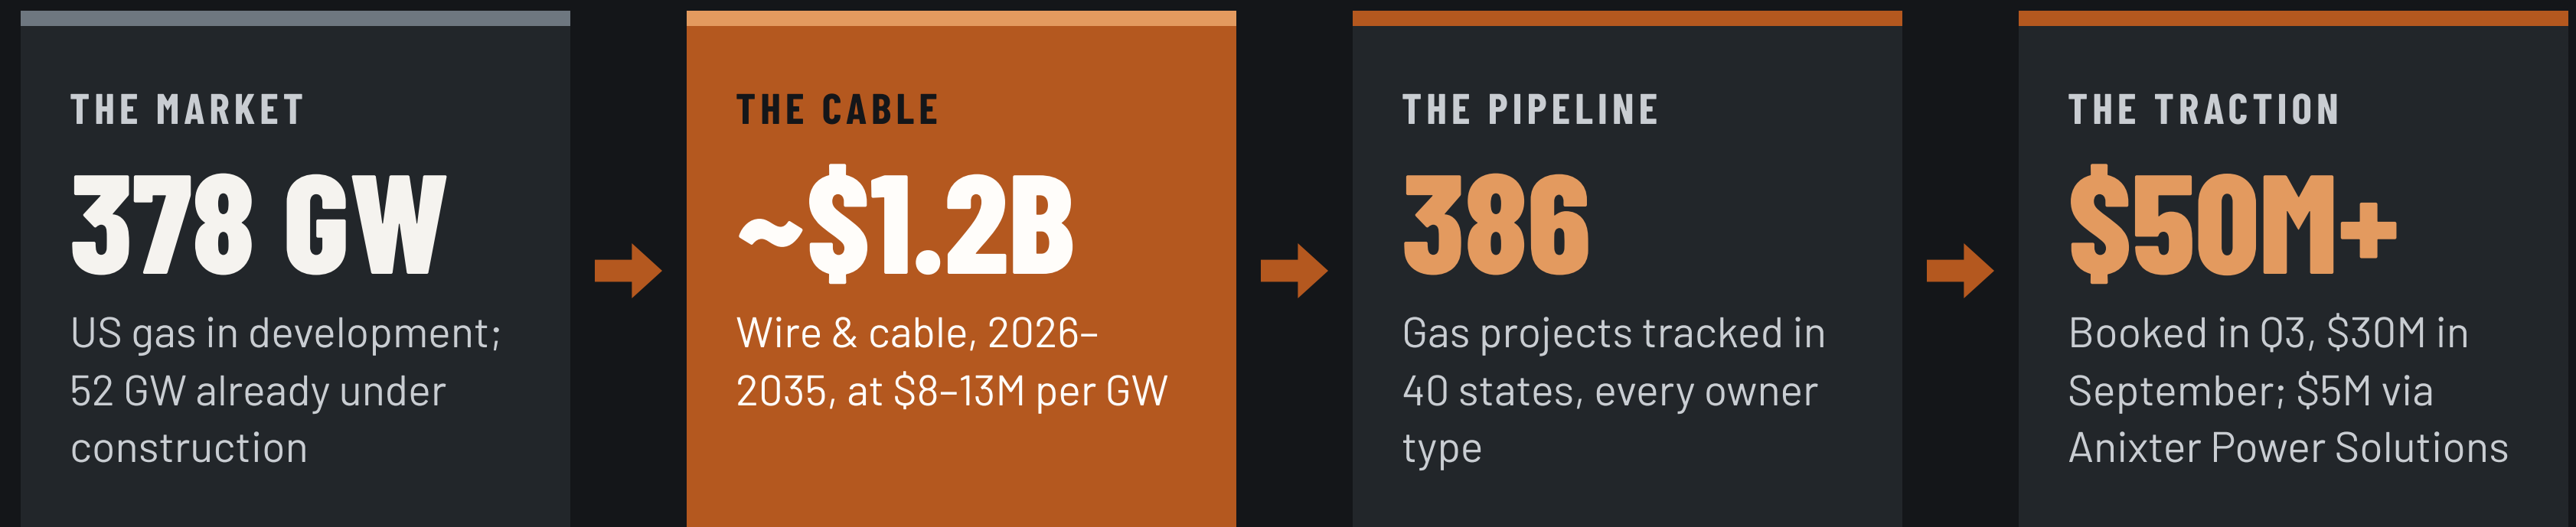

**TODAY'S ASK: PICK THE FIRST JOINT TARGETS, ASSIGN OWNERSHIP, BOOK THE FIRST CALLS**

# 01 BUSINESS UPDATE


**GAS POWER GENERATION ONLY**

MARKET, HISTORY AND OEM ORDER BOOKS

THE ~\$1.2B CABLE OPPORTUNITY

WHERE THE BUILD IS, OWNERS AND BUYERS

PURSUIT, PROGRESS AND COVERAGE

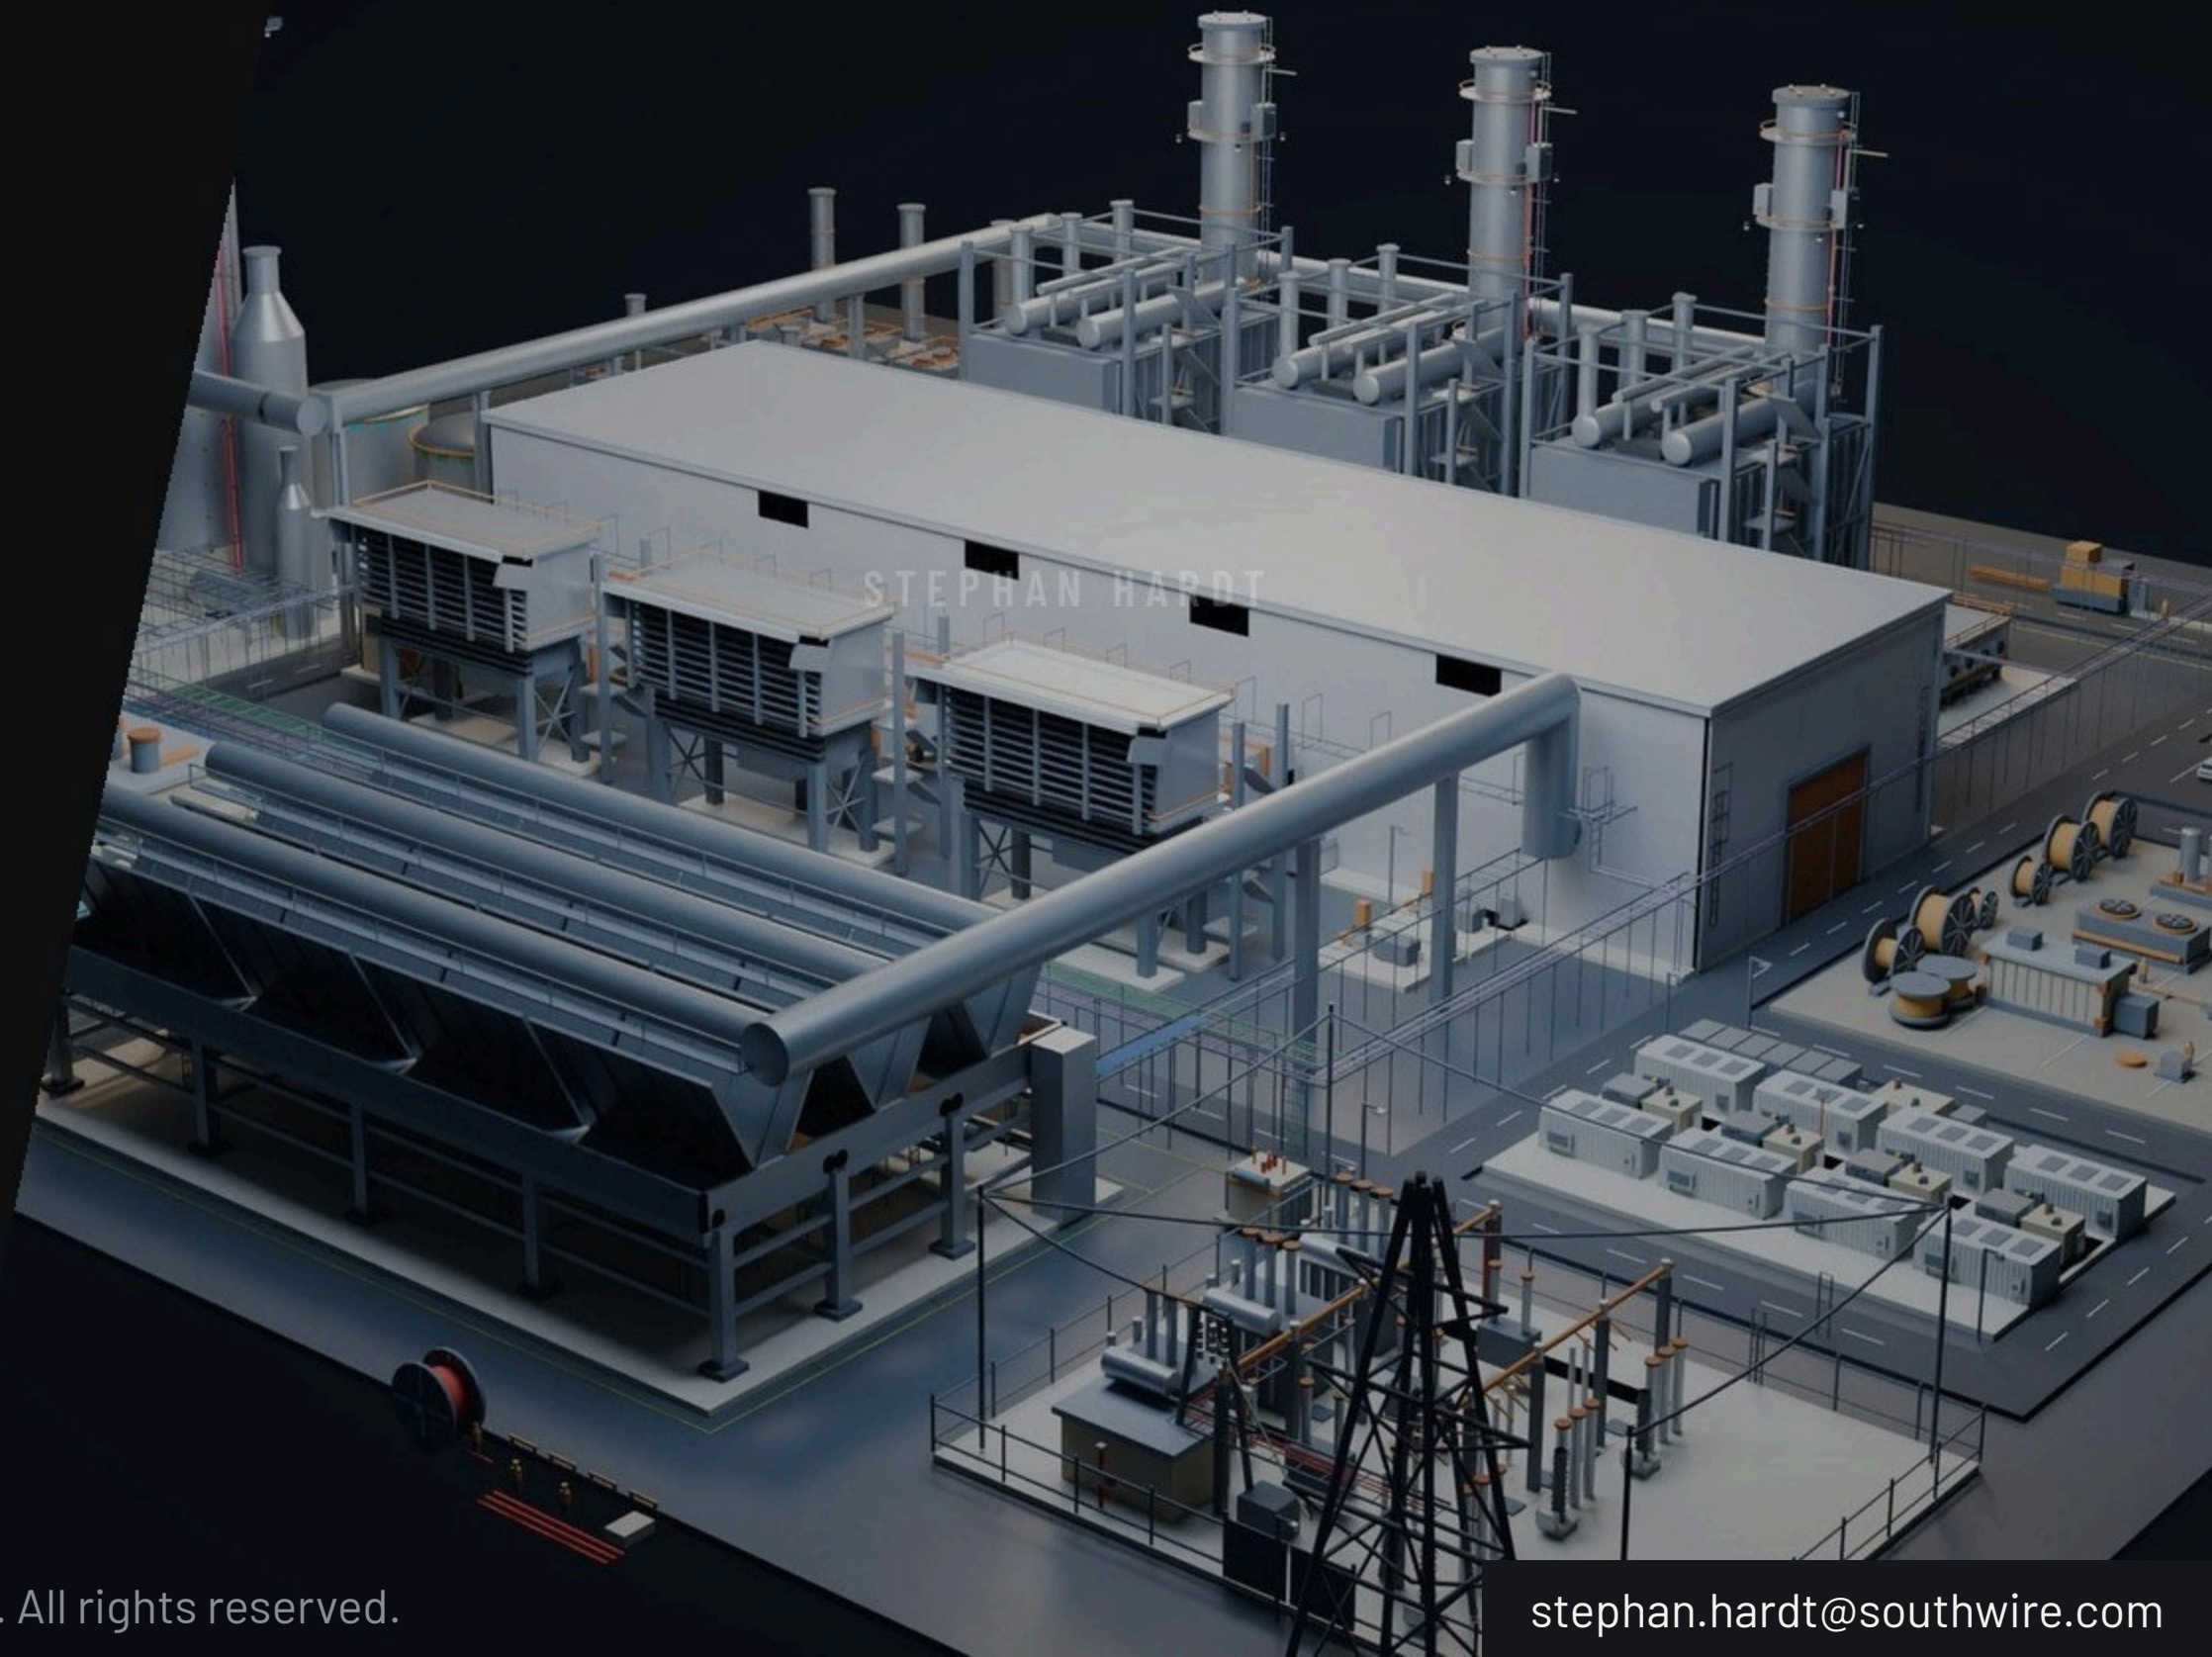



MARKET CONTEXT

# LOAD GROWTH IS PULLING GAS POWER FORWARD

166 GW

US peak load growth forecast by 2030

About 90 GW of it from data centers

378 GW

US gas power in development, mid-2026

189 GW tied to data centers

52 GW

under construction, up 76% in H1 2026


The largest gas build in the world

Up to 7 yrs

quoted lead time for some large gas turbines

Procurement decisions are being made now


US GAS CAPACITY ADDED PER YEAR, GW · PROVISIONAL

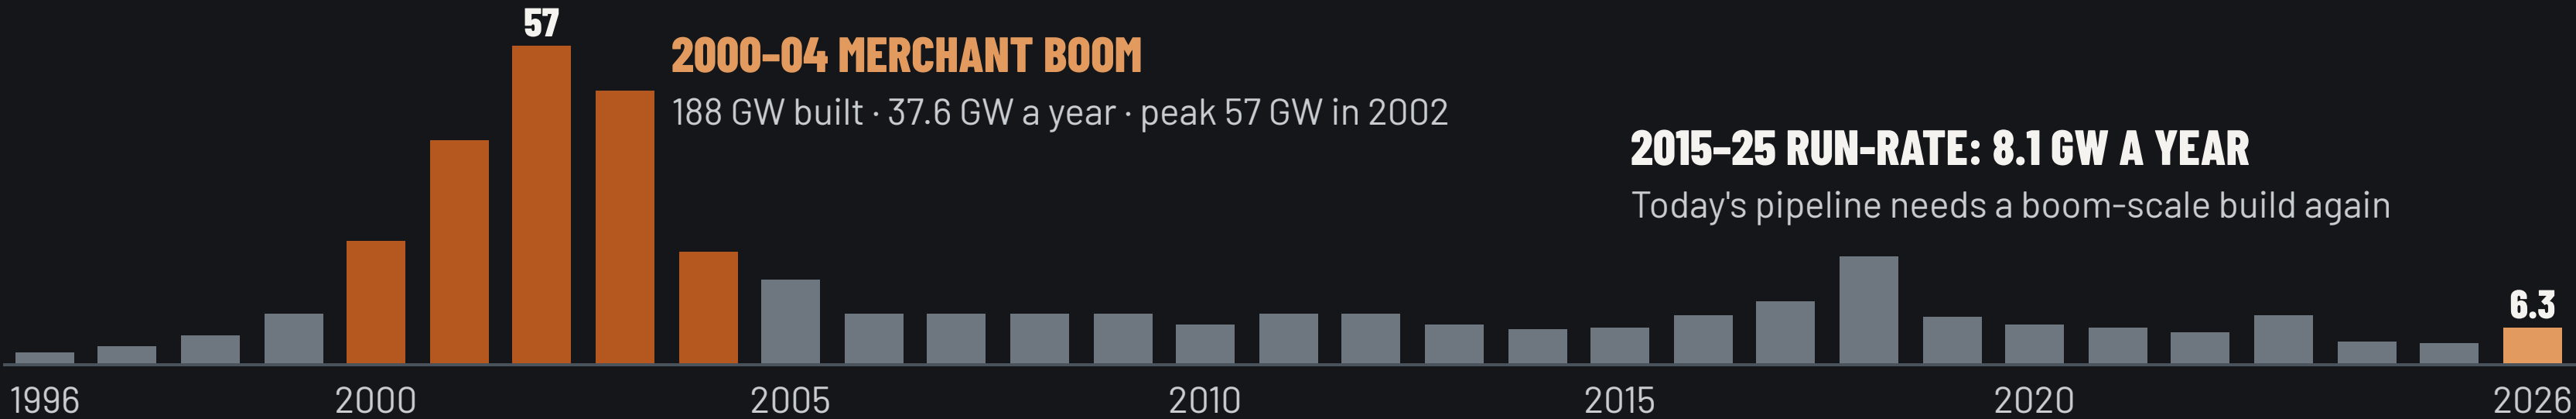

Sources: Grid Strategies, 2025; GEM, Aug 2026; S&P Global, May 2025. History: EIA and Southwire provisional series, to be verified.

OEM ORDER BOOKS

TURBINE BACKLOGS ARE FULL

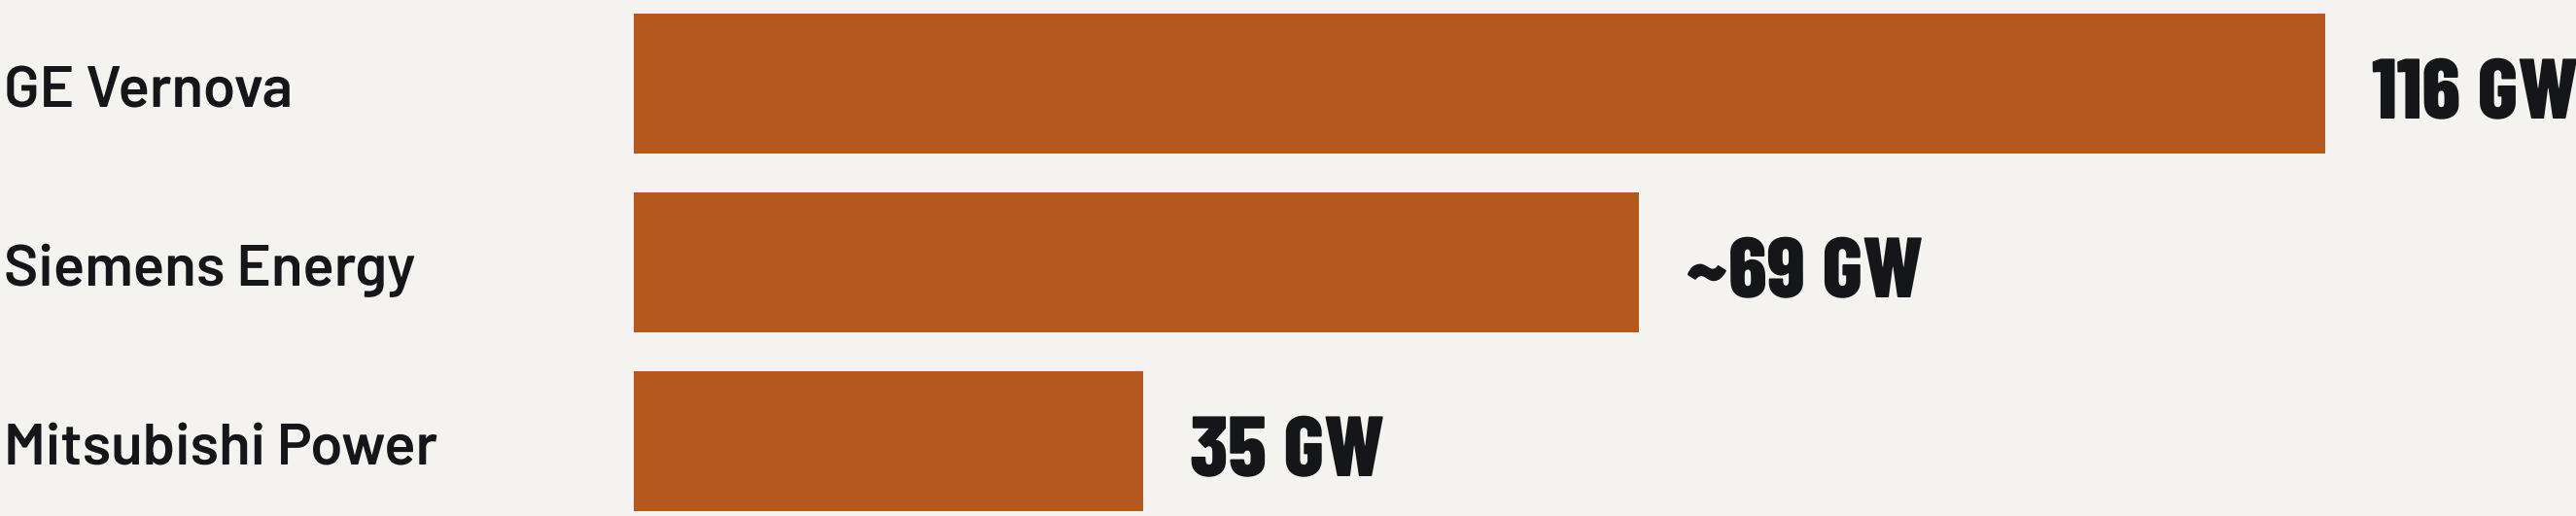

GE Vernova: firm backlog plus slot reservations, Q2 2026. Siemens Energy: gas turbine backlog, Q3 FY26. Mitsubishi: large-frame backlog, Aug 2026.

**+72%**

Caterpillar Power Generation sales, Q2 2026

**2.3 GW**

VoltaGrid modular gas fleet for Oracle's Texas AI data centers, plus 1 GW for Vantage

**500 MW**

standard modular SGT-800 plant from Siemens Energy and Eaton

Sources: GE Vernova, Siemens Energy, Caterpillar and Eaton releases; Utility Dive, Aug 2026; POWER, Oct 2025 and Feb 2026

# US GAS GENERATION: A \$1B+ WIRE & CABLE PRIZE

## CAPACITY ASSUMPTIONS

**378 GW**

Reported development pipeline

52 GW under construction  
× 90% = **46.8 GW**

326 GW in earlier stages  
× 13.5% = **44.0 GW**

+ 2.9 GW already operating in 2026

**93.7 GW**

Modeled additions through 2036



## WHOLE-PLANT INVESTMENT

**~\$180B**

Total plant investment over the period

**93.7 GW × \$1,923/kW**

Blended cost: CCGT, peakers and gas engines

**Whole-plant CapEx includes**

Generation equipment, auxiliaries, electrical systems and construction

\$2,000–2,400/kW is a whole-plant CCGT reference range



## PLANT-WIDE WIRE & CABLE

**\$0.75–1.2B**

Cable materials, 2026–2035

**93.7 GW × \$8–13M per GW**

Wire & cable content: \$8M low · \$13M high per GW  
= \$750M low · \$1.22B high


**UNDER 1% OF PLANT CAPEX, ON THE CRITICAL PATH TO FIRST POWER**

Pipeline: Global Energy Monitor, Aug 2026. Completion rates, blended cost and the \$8–13M per GW cable range are Southwire planning assumptions.

HOW BIG IS THE OPPORTUNITY?

~\$1.2B OF CORE GAS CABLE POS, 2026-2035

Core gas cable by purchase-order year. Project likelihood and supply caps are already in the model.

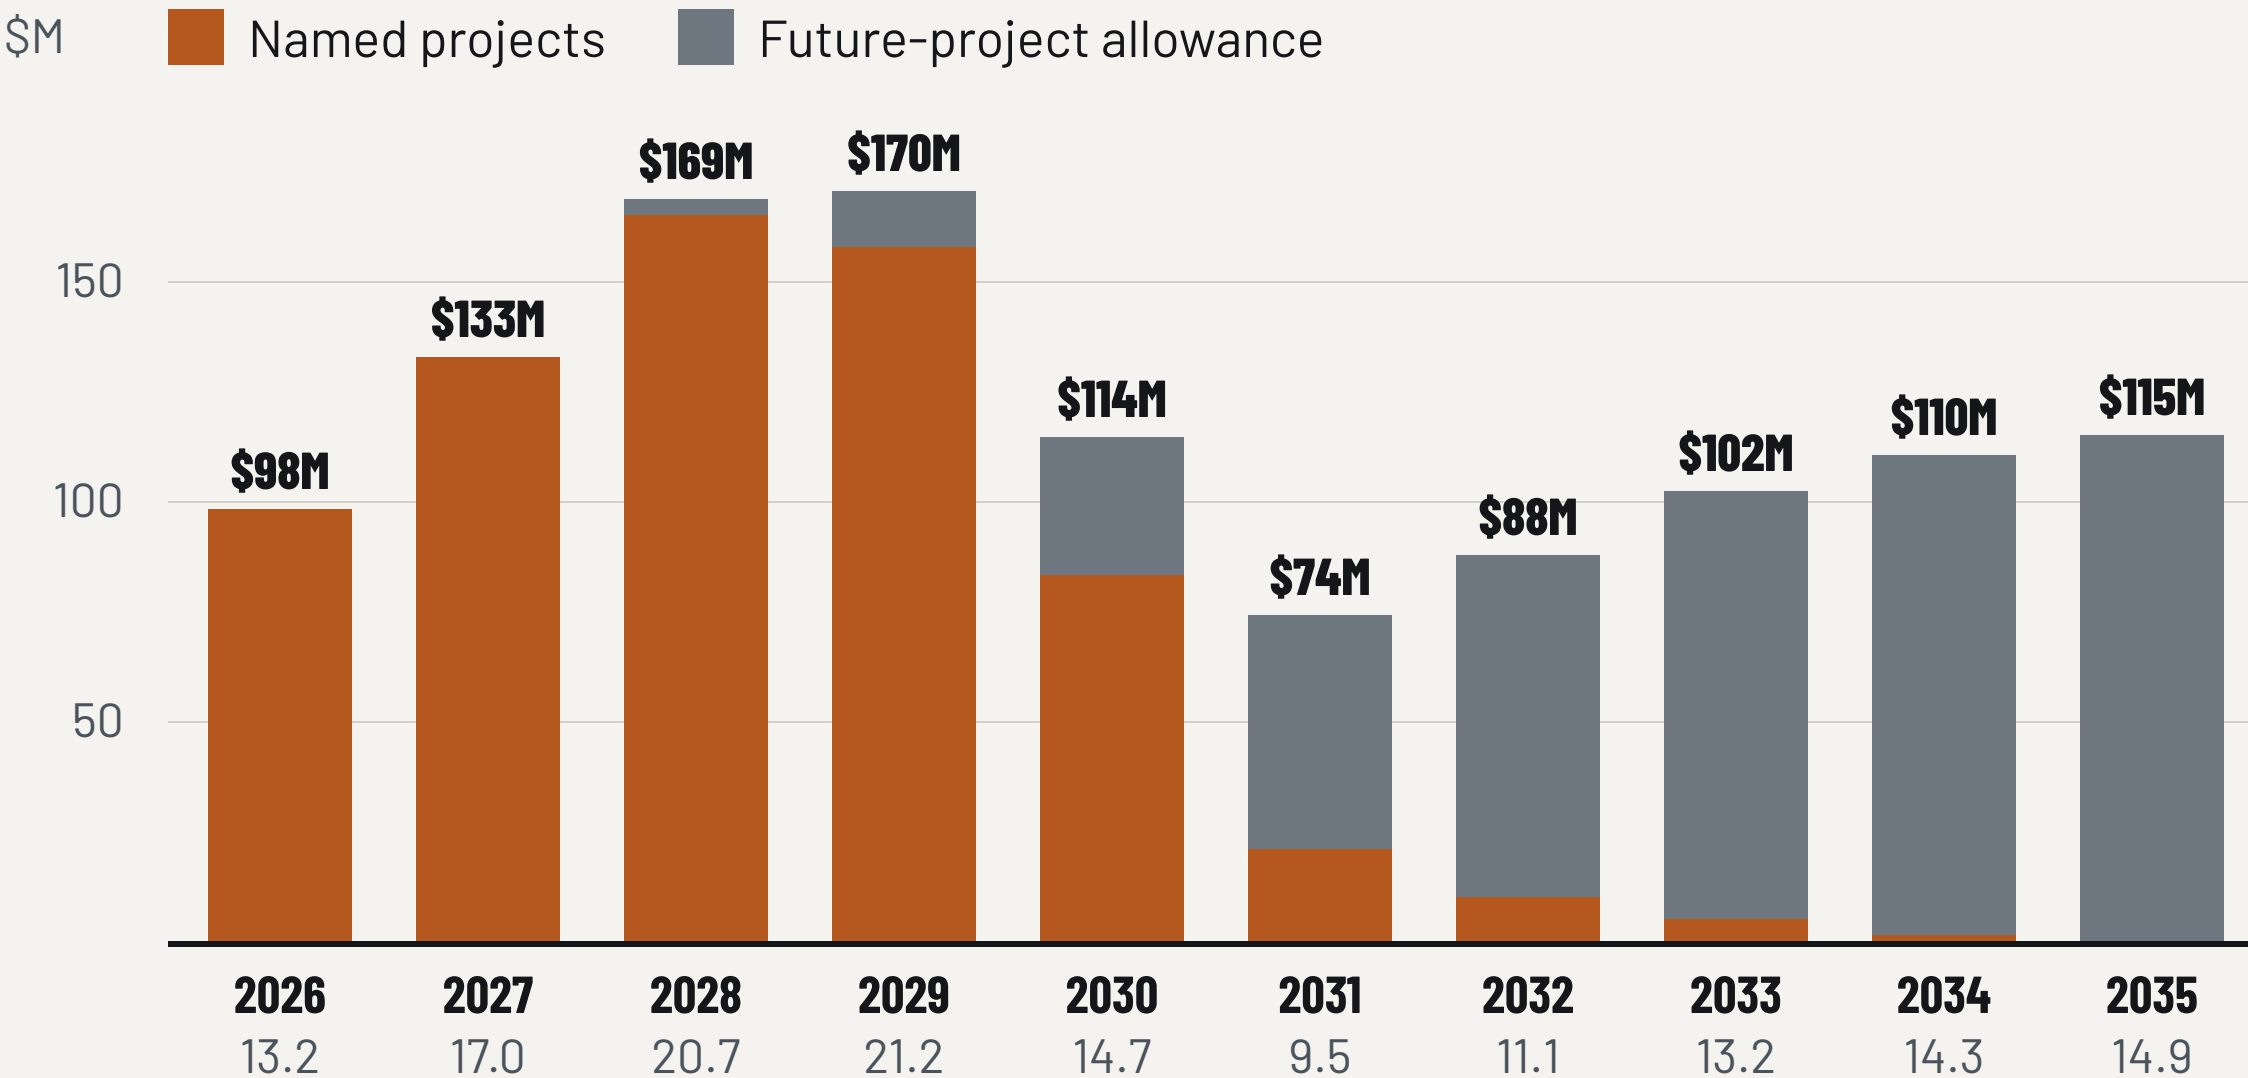

Below each year: modeled PO-year GW equivalents, not installed GW. Allowance has no named projects. Core rates (\$/kW): combined cycle 9.06 · simple cycle 6.79 · engines 5.44. OEM internal wiring and HV excluded.

~\$1.2B

2026-2035 priced core · provisional planning case


\$673M named  
\$501M allowance

GW × \$/kW = \$M  
× addressable share  
× win probability



REVIEWED PROJECT REGISTER

205.8 GW ELIGIBLE, MOST OF IT STILL EARLY

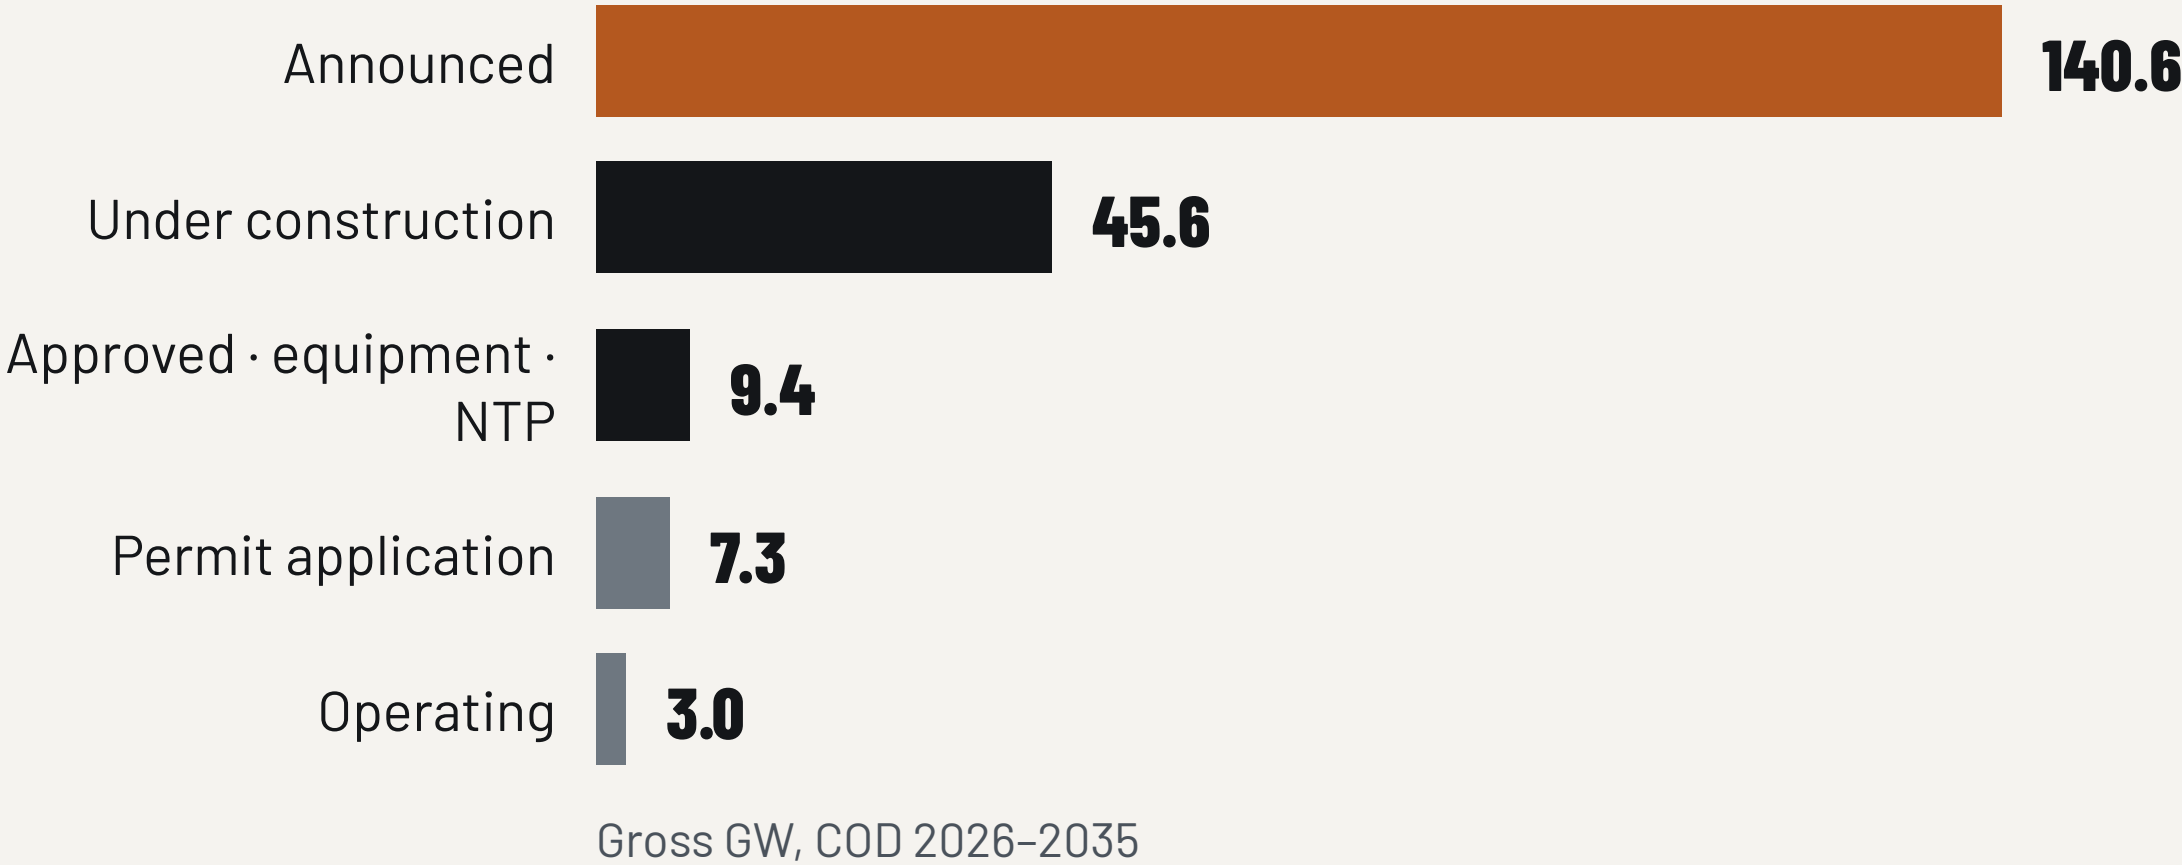

68%

OF ELIGIBLE CAPACITY IS ONLY ANNOUNCED


Being on the register does not mean a cable package is open.

Source: Southwire PowerGen register, Sep 11, 2026: 386 records across 305 site groups. Excludes queue-only and undated records.


PROJECT CONCENTRATION

WHERE THE BUILD IS, WHO OWNS IT, WHAT KIND OF SITE

GROSS GW BY STATE · 386 PROJECTS, COD 2026-2035

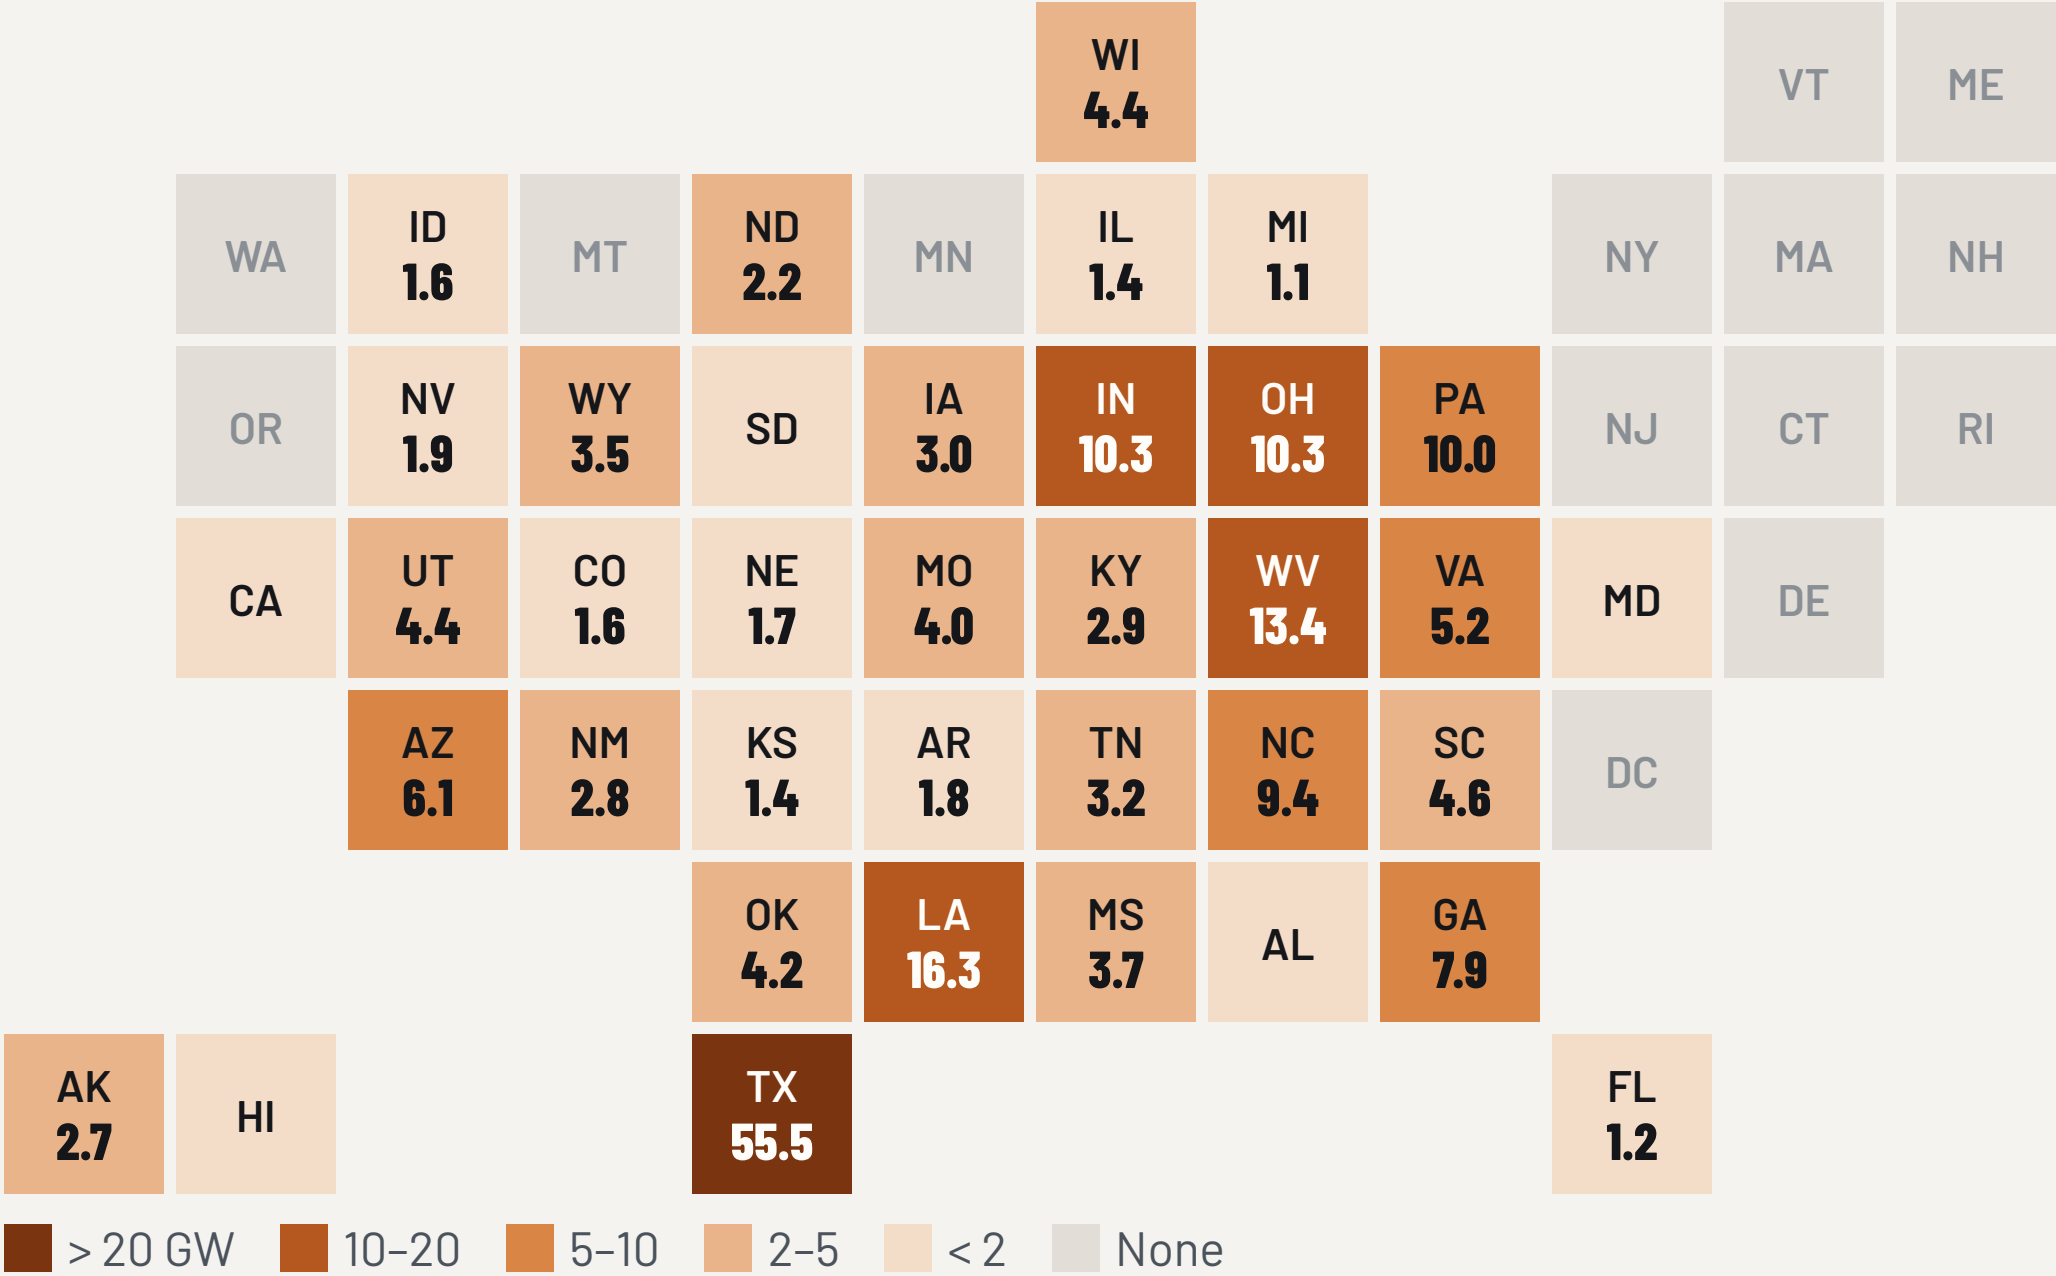

OWNER × SITE, GROSS GW

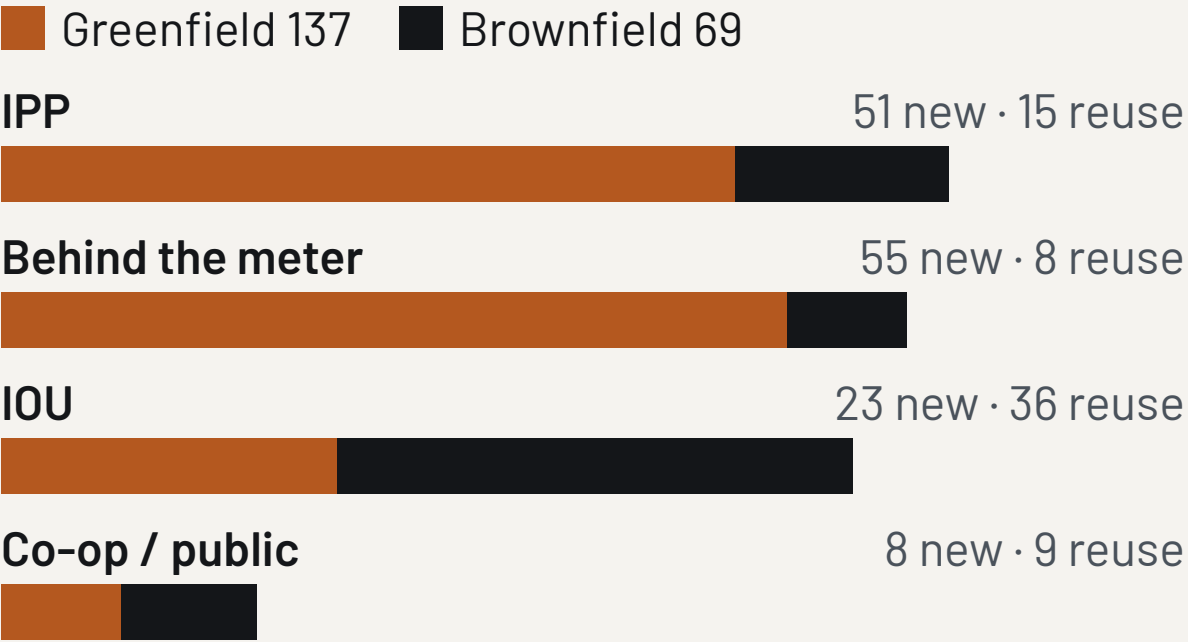


IOUS REUSE OLD SITES; IPPS AND BTM BUILD NEW

|                                   |      |
|-----------------------------------|------|
| Greenfield, grid-connected        | 77.0 |
| Data-center / BTM campus          | 54.5 |
| Coal-site repower                 | 41.3 |
| Expansion at operating plant      | 21.4 |
| Industrial captive and site reuse | 11.6 |

Source: Southwire PowerGen register, Sep 11, 2026. Gross GW, unweighted. Site classes provisional (Rev01).

# THREE TURBINE OEMS CARRY 40% OF THE CAPACITY

## GROSS GW BY OEM

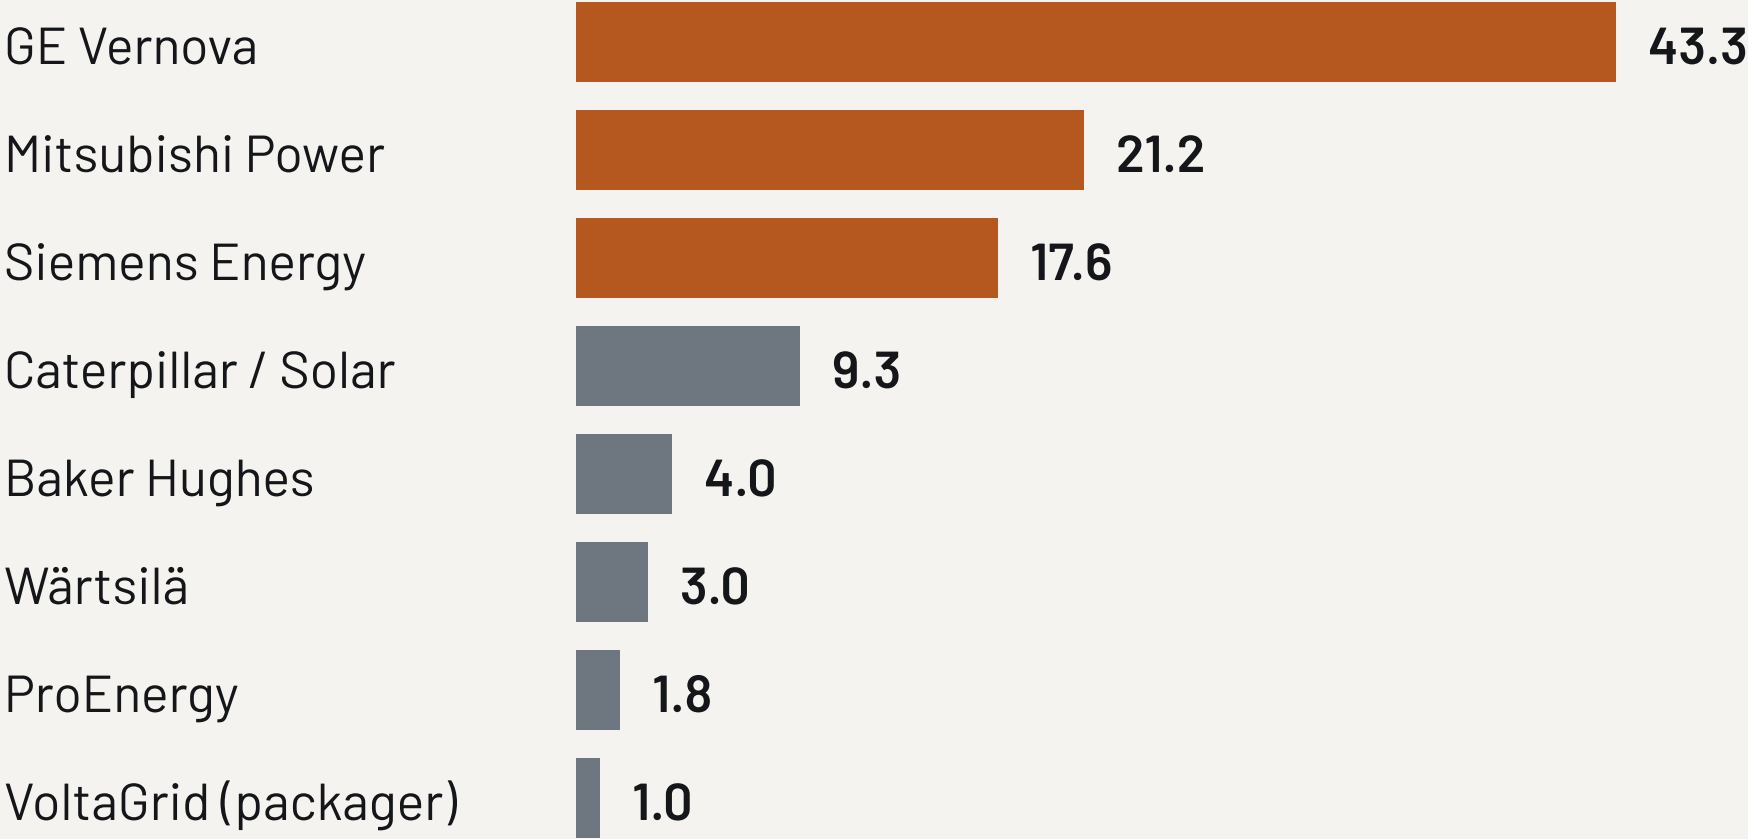

## NAMED EPCS, GROSS GW

| EPC / constructor   | GW  |
|---------------------|-----|
| Kiewit / TIC        | 6.8 |
| Zachry / Quanta     | 2.6 |
| Gemma Power Systems | 2.5 |
| PCL                 | 1.5 |
| Burns & McDonnell   | 0.4 |

87% of gross capacity has no confirmed constructor yet: buyer discovery is the next job.

Source: Southwire PowerGen commercial priorities model, Sep 11, 2026. Gross GW, unweighted. Copper = the three turbine OEMs; grey = engines, aeroderivatives and VoltaGrid.



INDUSTRY PARTICIPANTS

PRIORITY PLAYERS ACROSS THE BUYING CHAIN

| Buying lane                | Examples                                         | What to establish                                     |
|----------------------------|--------------------------------------------------|-------------------------------------------------------|
| Owners · developers        | NRG, CPV, Entergy, Homer City Redevelopment      | Project phase, EPC, procurement route                 |
| EPC · engineering          | Kiewit, Gemma, Burns & McDonnell, Black & Veatch | Electrical package buyer and spec access              |
| Turbine · engine OEMs      | GE Vernova, Siemens Energy, Mitsubishi Power     | Equipment interfaces, approved cable constructions    |
| Modular · package builders | VoltaGrid, nVent, Powell, Fibrebond, Panelmatic  | Internal BOM, repeat demand, assembly and channel fit |

The owner influences the spec. Another party often buys the cable.


NAMED PROJECT PURSUITS

TOP 7 OF 17 PRIORITY PURSUITS

| Project · owner group   | State | Gross MW | Constructor · next check              | Gross POs 27–29, \$M |
|-------------------------|-------|----------|---------------------------------------|----------------------|
| Homer City · IPP        | PA    | 4,396    | Kiewit: campus phase releases         | 21.9                 |
| Roxboro CC1 + CC2 · IOU | NC    | 2,549    | Zachry: separate unit packages        | 13.0                 |
| Bison 1 + 2 · co-op     | ND    | 1,458    | PCL electrical buyer; B&M engineering | 8.0                  |
| CPV Basin Ranch · IPP   | TX    | 1,345    | Gemma: remaining purchase releases    | 7.8                  |
| Smarr · co-op           | GA    | 1,335    | TIC: specification and cable schedule | 7.8                  |
| Sadow Lakes · IPP       | TX    | 1,200    | Gemma: whether bulk cable is awarded  | 5.2                  |
| Lowman LEC 3 · co-op    | AL    | 401      | B&M: simple-cycle expansion scope     | 2.3                  |

SOUTHWIRE PROGRESS

FROM DISCOVERY TO EXECUTION IN SIX MONTHS

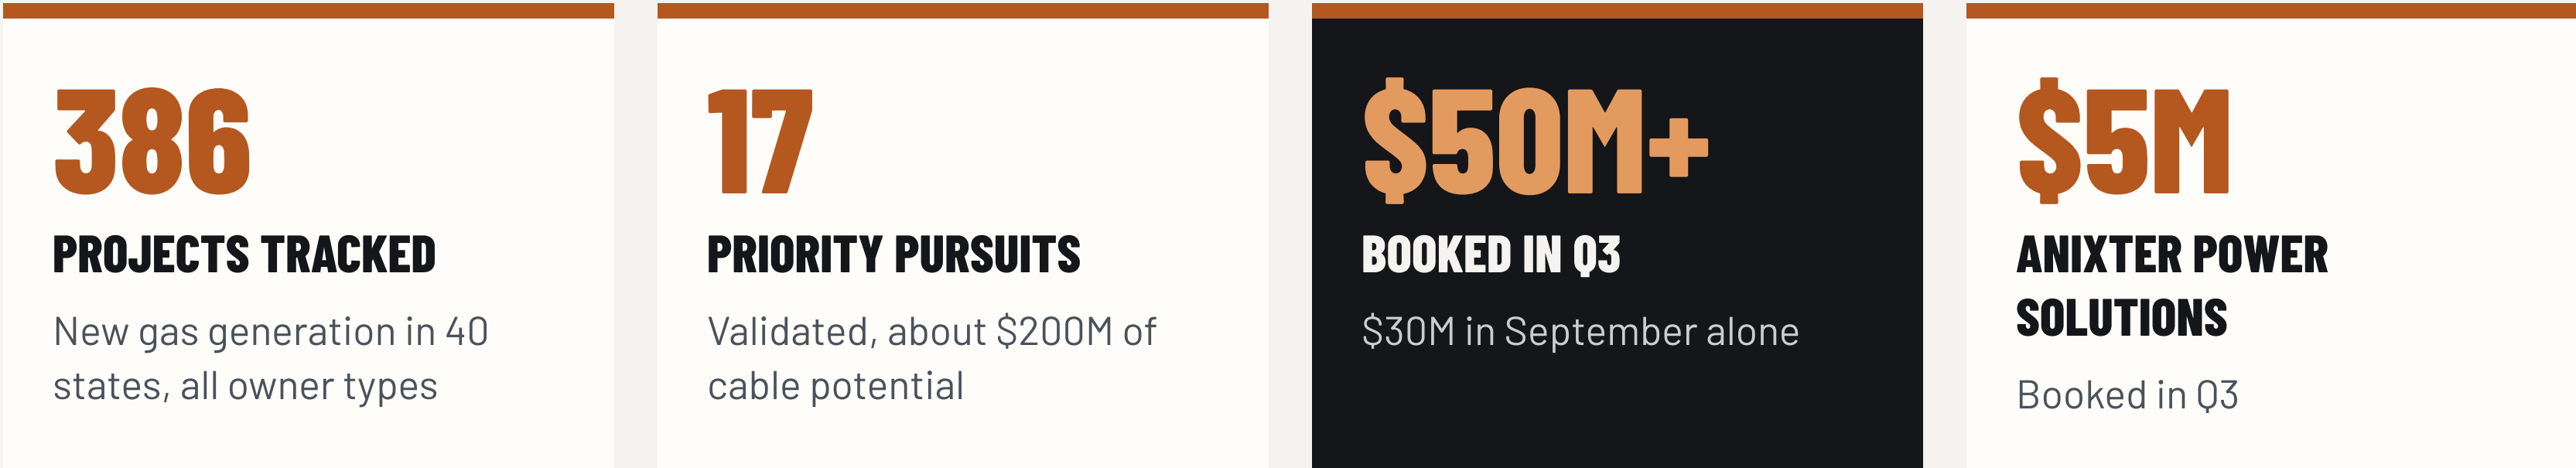


Power Generation became its own Southwire vertical in early 2026. Owner conversations showed that cable is specified and bought through EPCs and package builders, so the pursuit model now follows that path.



## GO-TO-MARKET MODEL

# WE FOLLOW THE WAY THE PROJECT IS BOUGHT

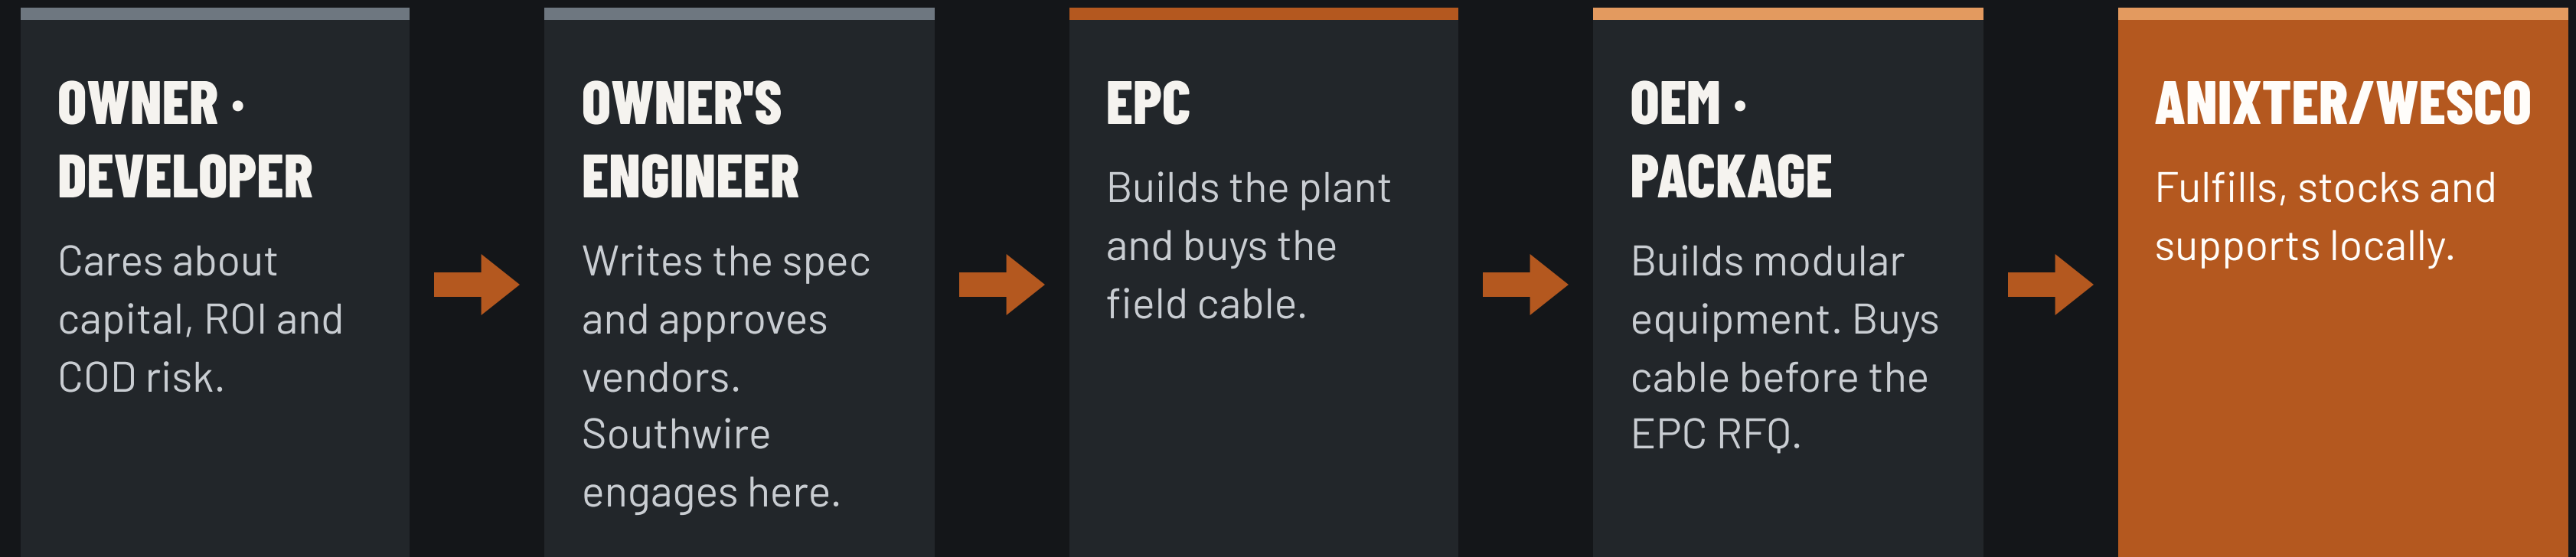

**Influence flows back:** the owner's engineer and EPC shape what the owner approves, so specification wins are made upstream.

**CABLE INSIDE PACKAGED EQUIPMENT IS BOUGHT MONTHS BEFORE THE EPC ISSUES ITS FIELD-CABLE RFQ.**

COVERAGE MODEL

NAMED COVERAGE AT EVERY BUYING POINT

| Name                   | Role                                                                        | Focus                                     |
|------------------------|-----------------------------------------------------------------------------|-------------------------------------------|
| Stephan Hardt          | PowerGen strategy, plant model, owners and OEMs                             | National                                  |
| Patrick Ritchie        | EPC account manager, Kansas City                                            | Kiewit, Burns & McDonnell, Black & Veatch |
| Greyson                | EPC outreach to more gas-plant builders                                     | National                                  |
| Phil Metz · Bob Benish | OEMs and package builders: e-houses, switchgear, modular power, panel shops | National                                  |
| Anixter/Wesco          | Modular OEM Solutions: the same package builders, channel side              | National                                  |

Priority geography: Texas · Ohio · Indiana

Priority EPCs: Kiewit and Burns & McDonnell



# 02 GAS POWER SOLUTIONS

THE PLANT MODEL AND CABLE SYSTEMS

CABLE LINEUP AND DETAIL

MODULAR GAS POWER

STANDARDS AND SERVICES



THE CHALLENGE

EVERY MEGAWATT TRAVELS THROUGH A CABLE

COMBINED CYCLE PLANTS

|                  |                                                             |
|------------------|-------------------------------------------------------------|
| HEAT             | Routes beside turbines, HRSGs and steam lines               |
| DAILY CYCLING    | Frequent starts stress terminations and joints              |
| FIRE AND SMOKE   | Flame-retardant, low-smoke cable in halls and control rooms |
| ELECTRICAL NOISE | Drives and switchgear next to DCS and protection            |


MODULAR GAS POWER

|                |                                                 |
|----------------|-------------------------------------------------|
| COMPACT SKIDS  | Flexible cable with tight bend radii            |
| VIBRATION      | Fine stranding and secure glands for engines    |
| HARSH SITES    | Oil, fuel, sunlight and wide temperature ranges |
| SPEED TO POWER | Pre-terminated, tested harnesses cut site hours |



THE PLANT IS THE MODEL

# 16 ZONES, 75 EQUIPMENT NODES

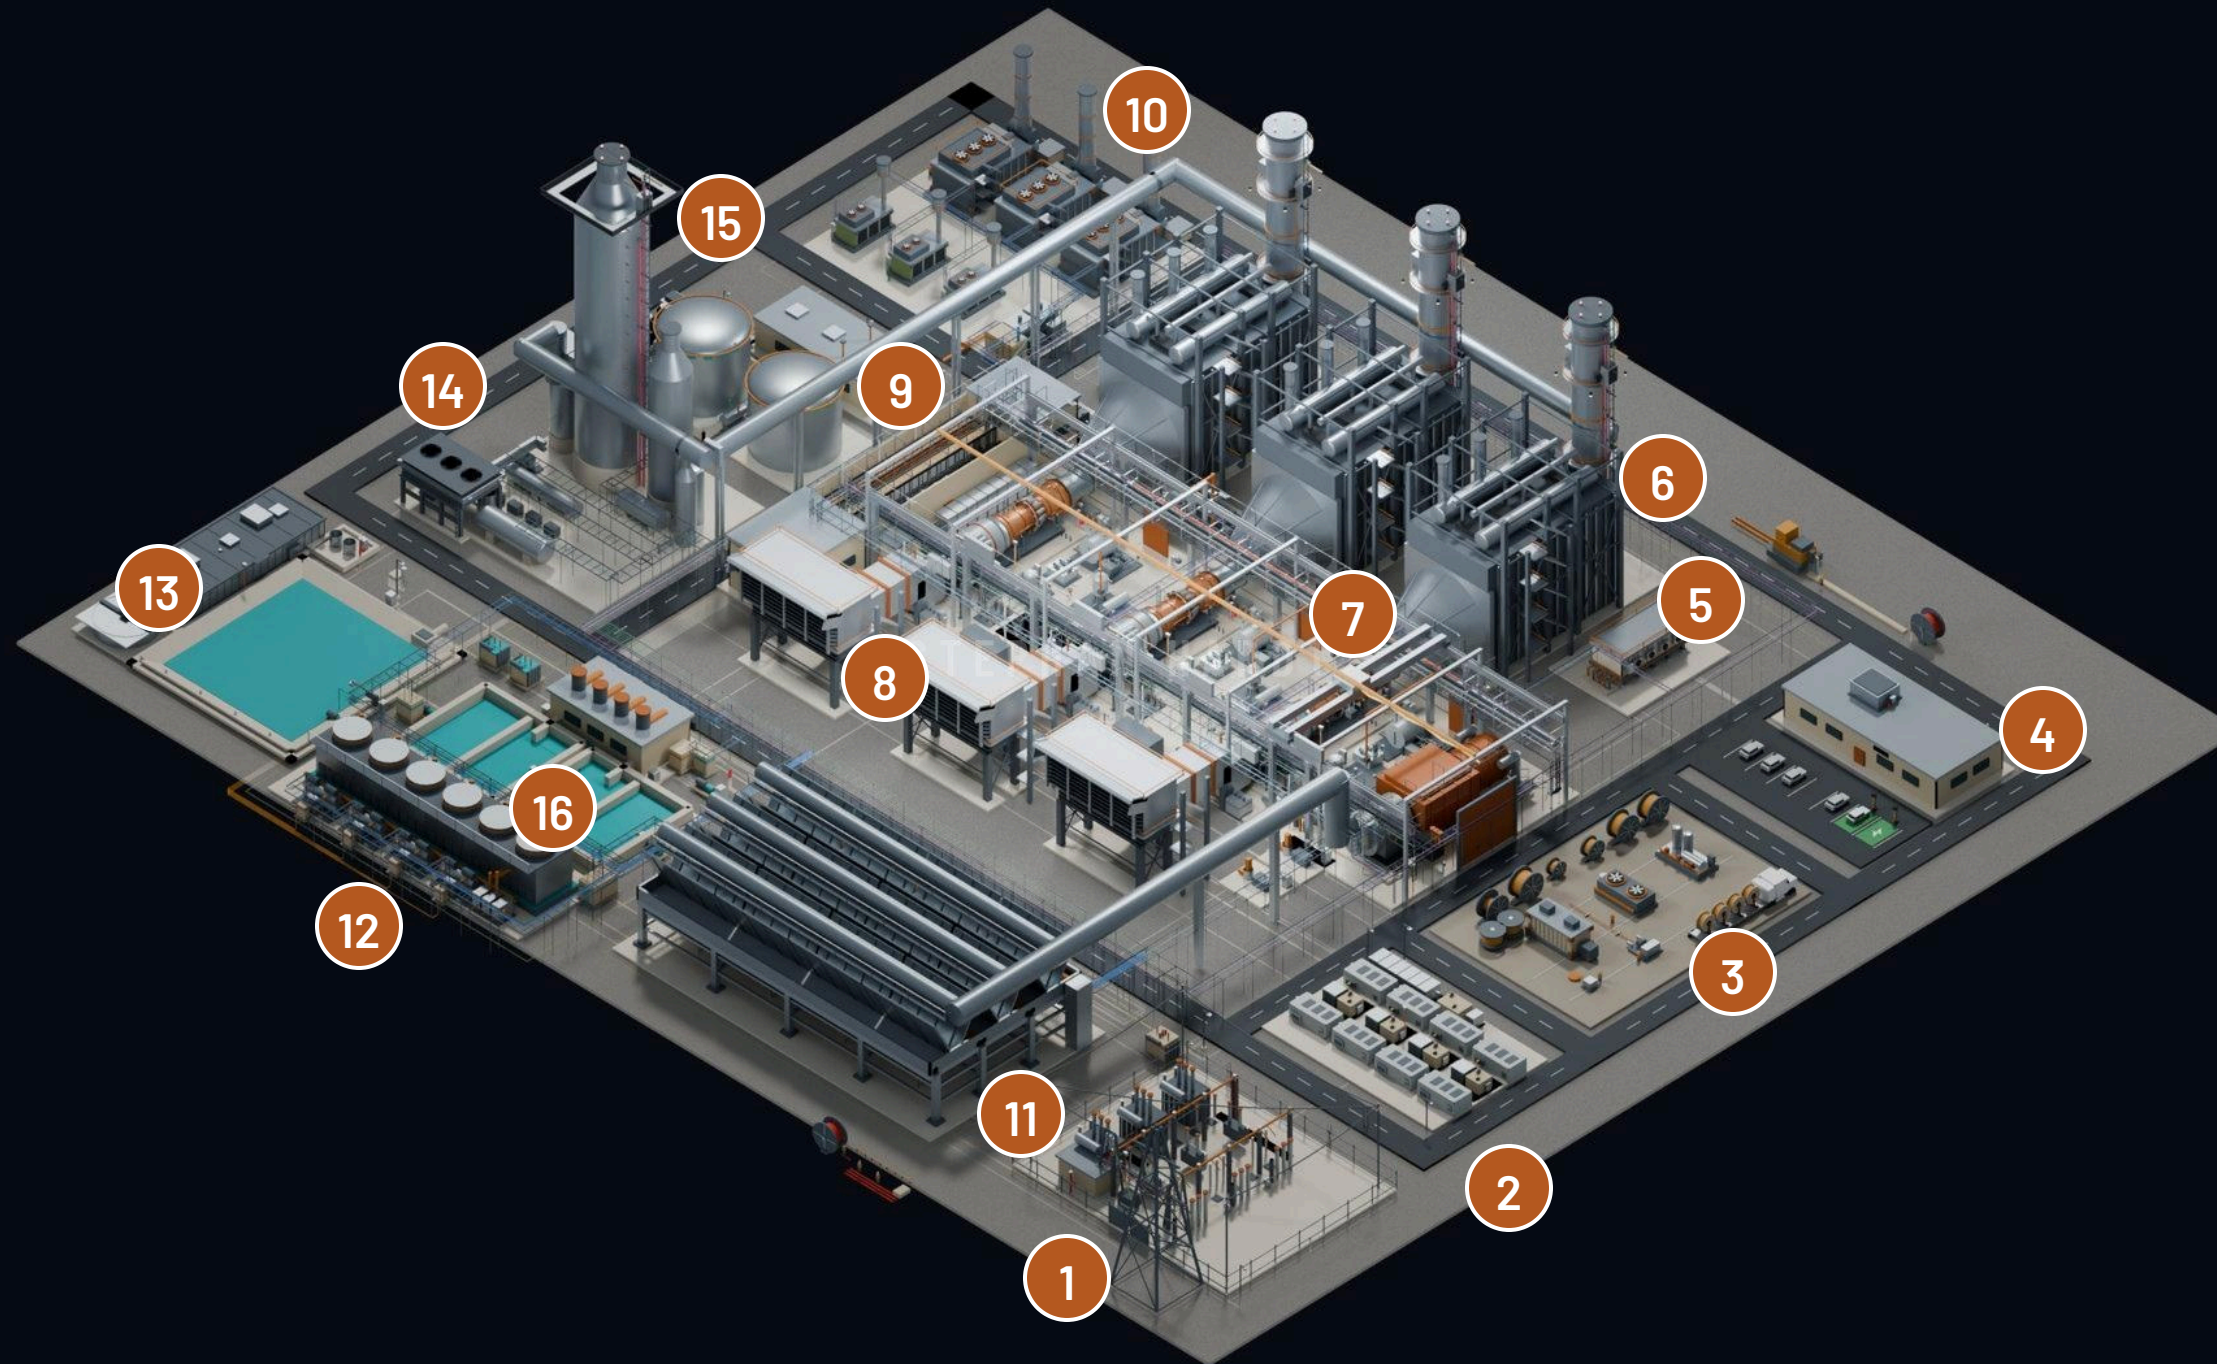


- 01 Switchyard, GSU & grid tie
- 02 BESS yard
- 03 Reel staging & prefab
- 04 Admin & control room
- 05 E-house
- 06 HRSG trains & stacks
- 07 Turbine hall
- 08 GT air inlets
- 09 MCC, VFD & UPS room
- 10 Modular power yard
- 11 Air-cooled condenser
- 12 Chillers & cooling towers
- 13 Water treatment
- 14 Carbon capture (CCS)
- 15 Gas metering
- 16 Cable corridor & MV

PLANT • EQUIPMENT • CABLE • DELIVERY



# SEVEN CABLE SYSTEMS IN ONE PLANT

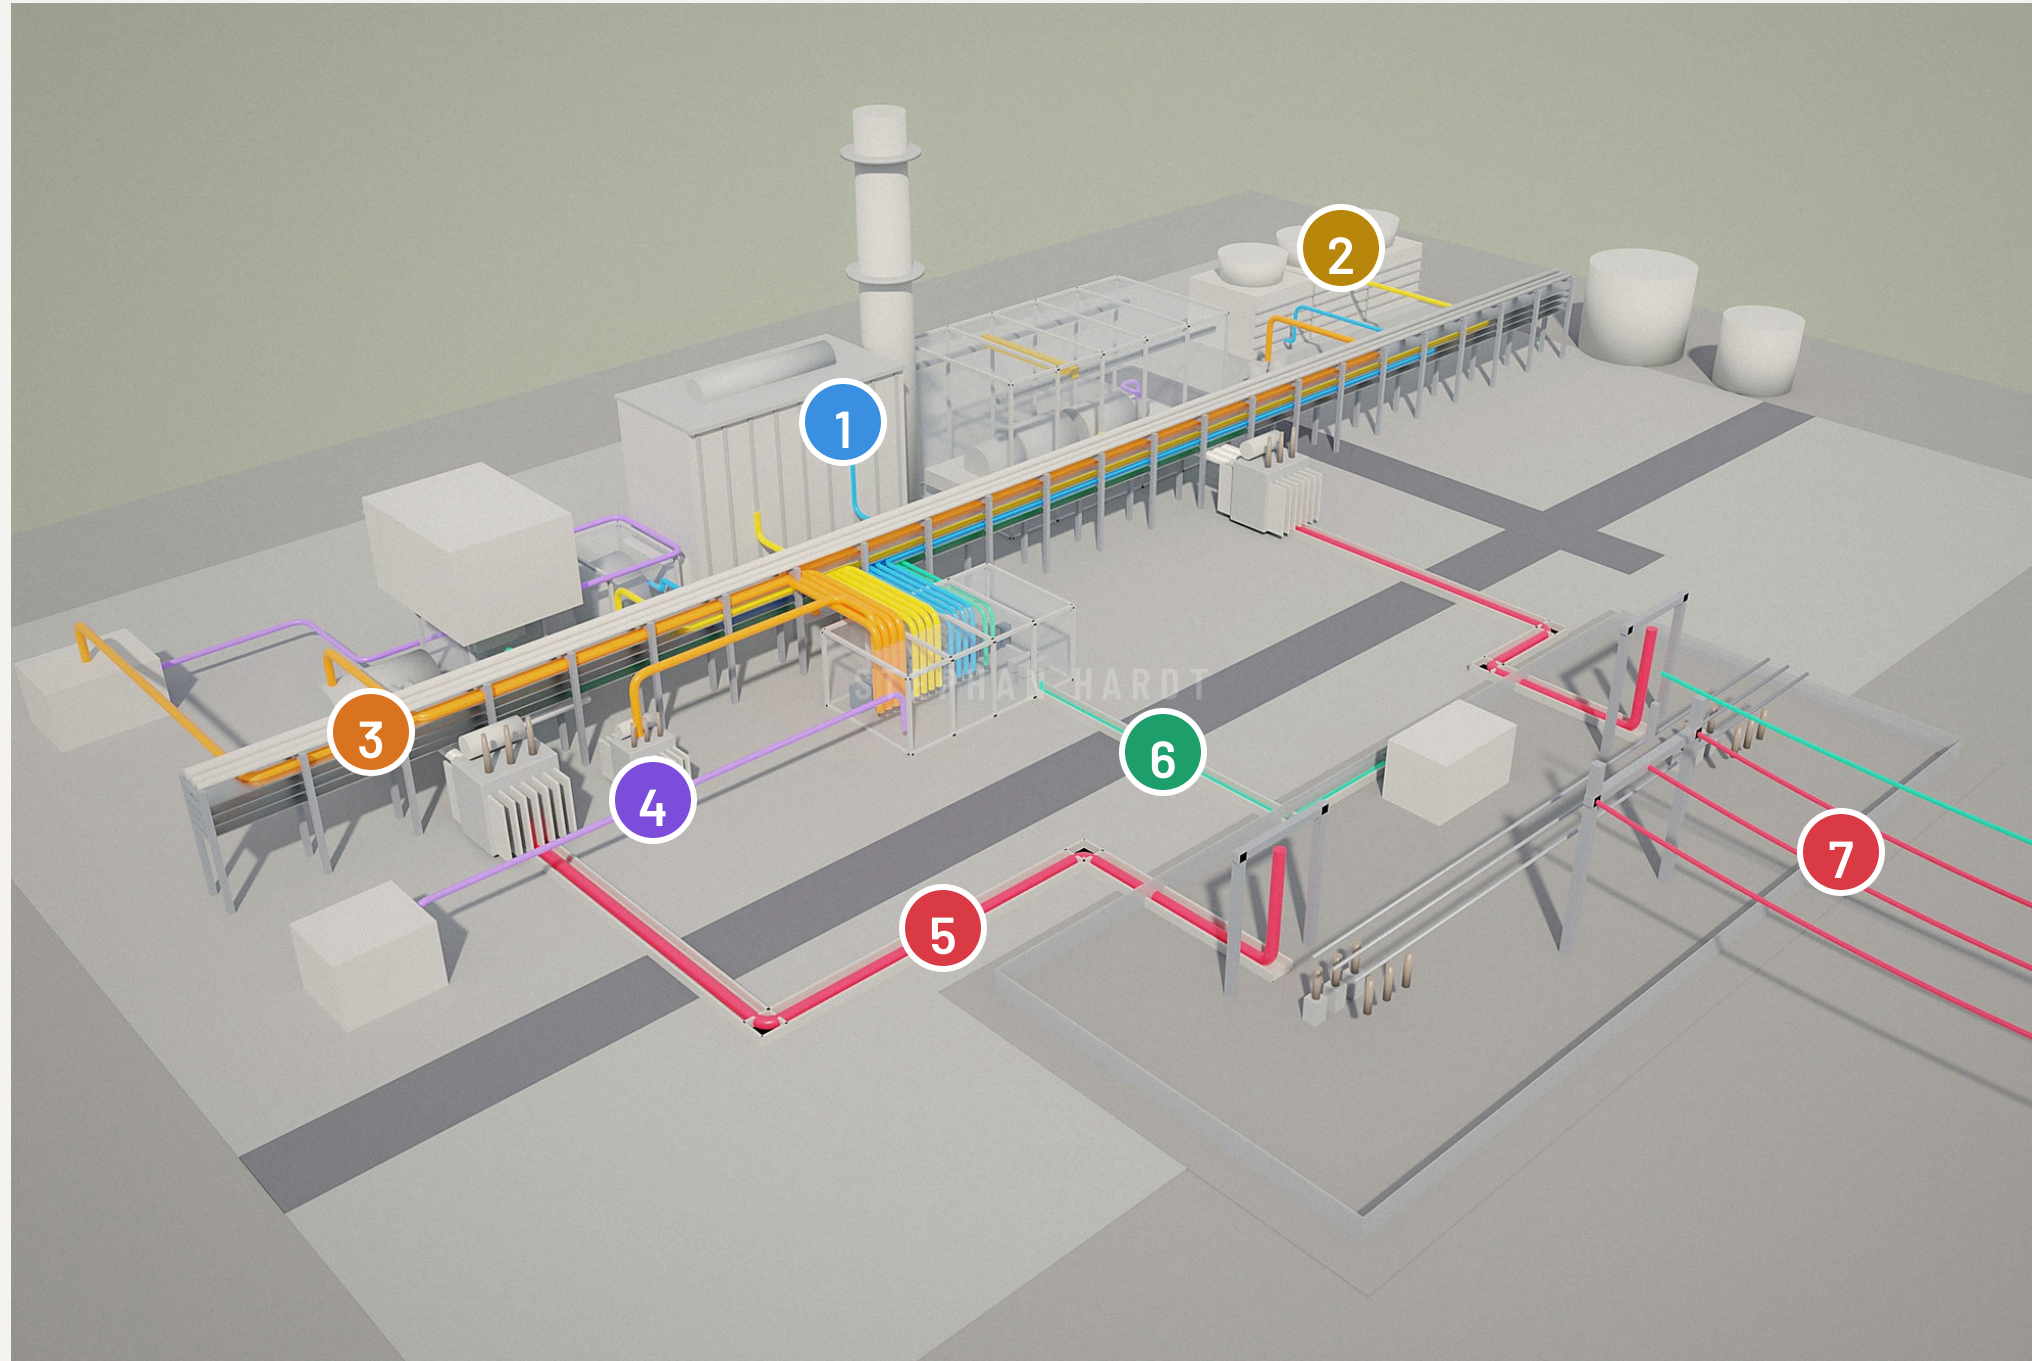


- 1 Control & instrumentation
- 2 LV power & VFD cable
- 3 Medium-voltage feeders
- 4 Fire-rated & specialty
- 5 High-voltage XLPE cable
- 6 Fibre optic
- 7 Overhead conductor & OPGW

ILLUSTRATIVE 1×1 COMBINED CYCLE BLOCK · CABLE DIAMETERS EXAGGERATED

Confidential · Do not distribute · © 2026 Southwire Company, LLC. All rights reserved.



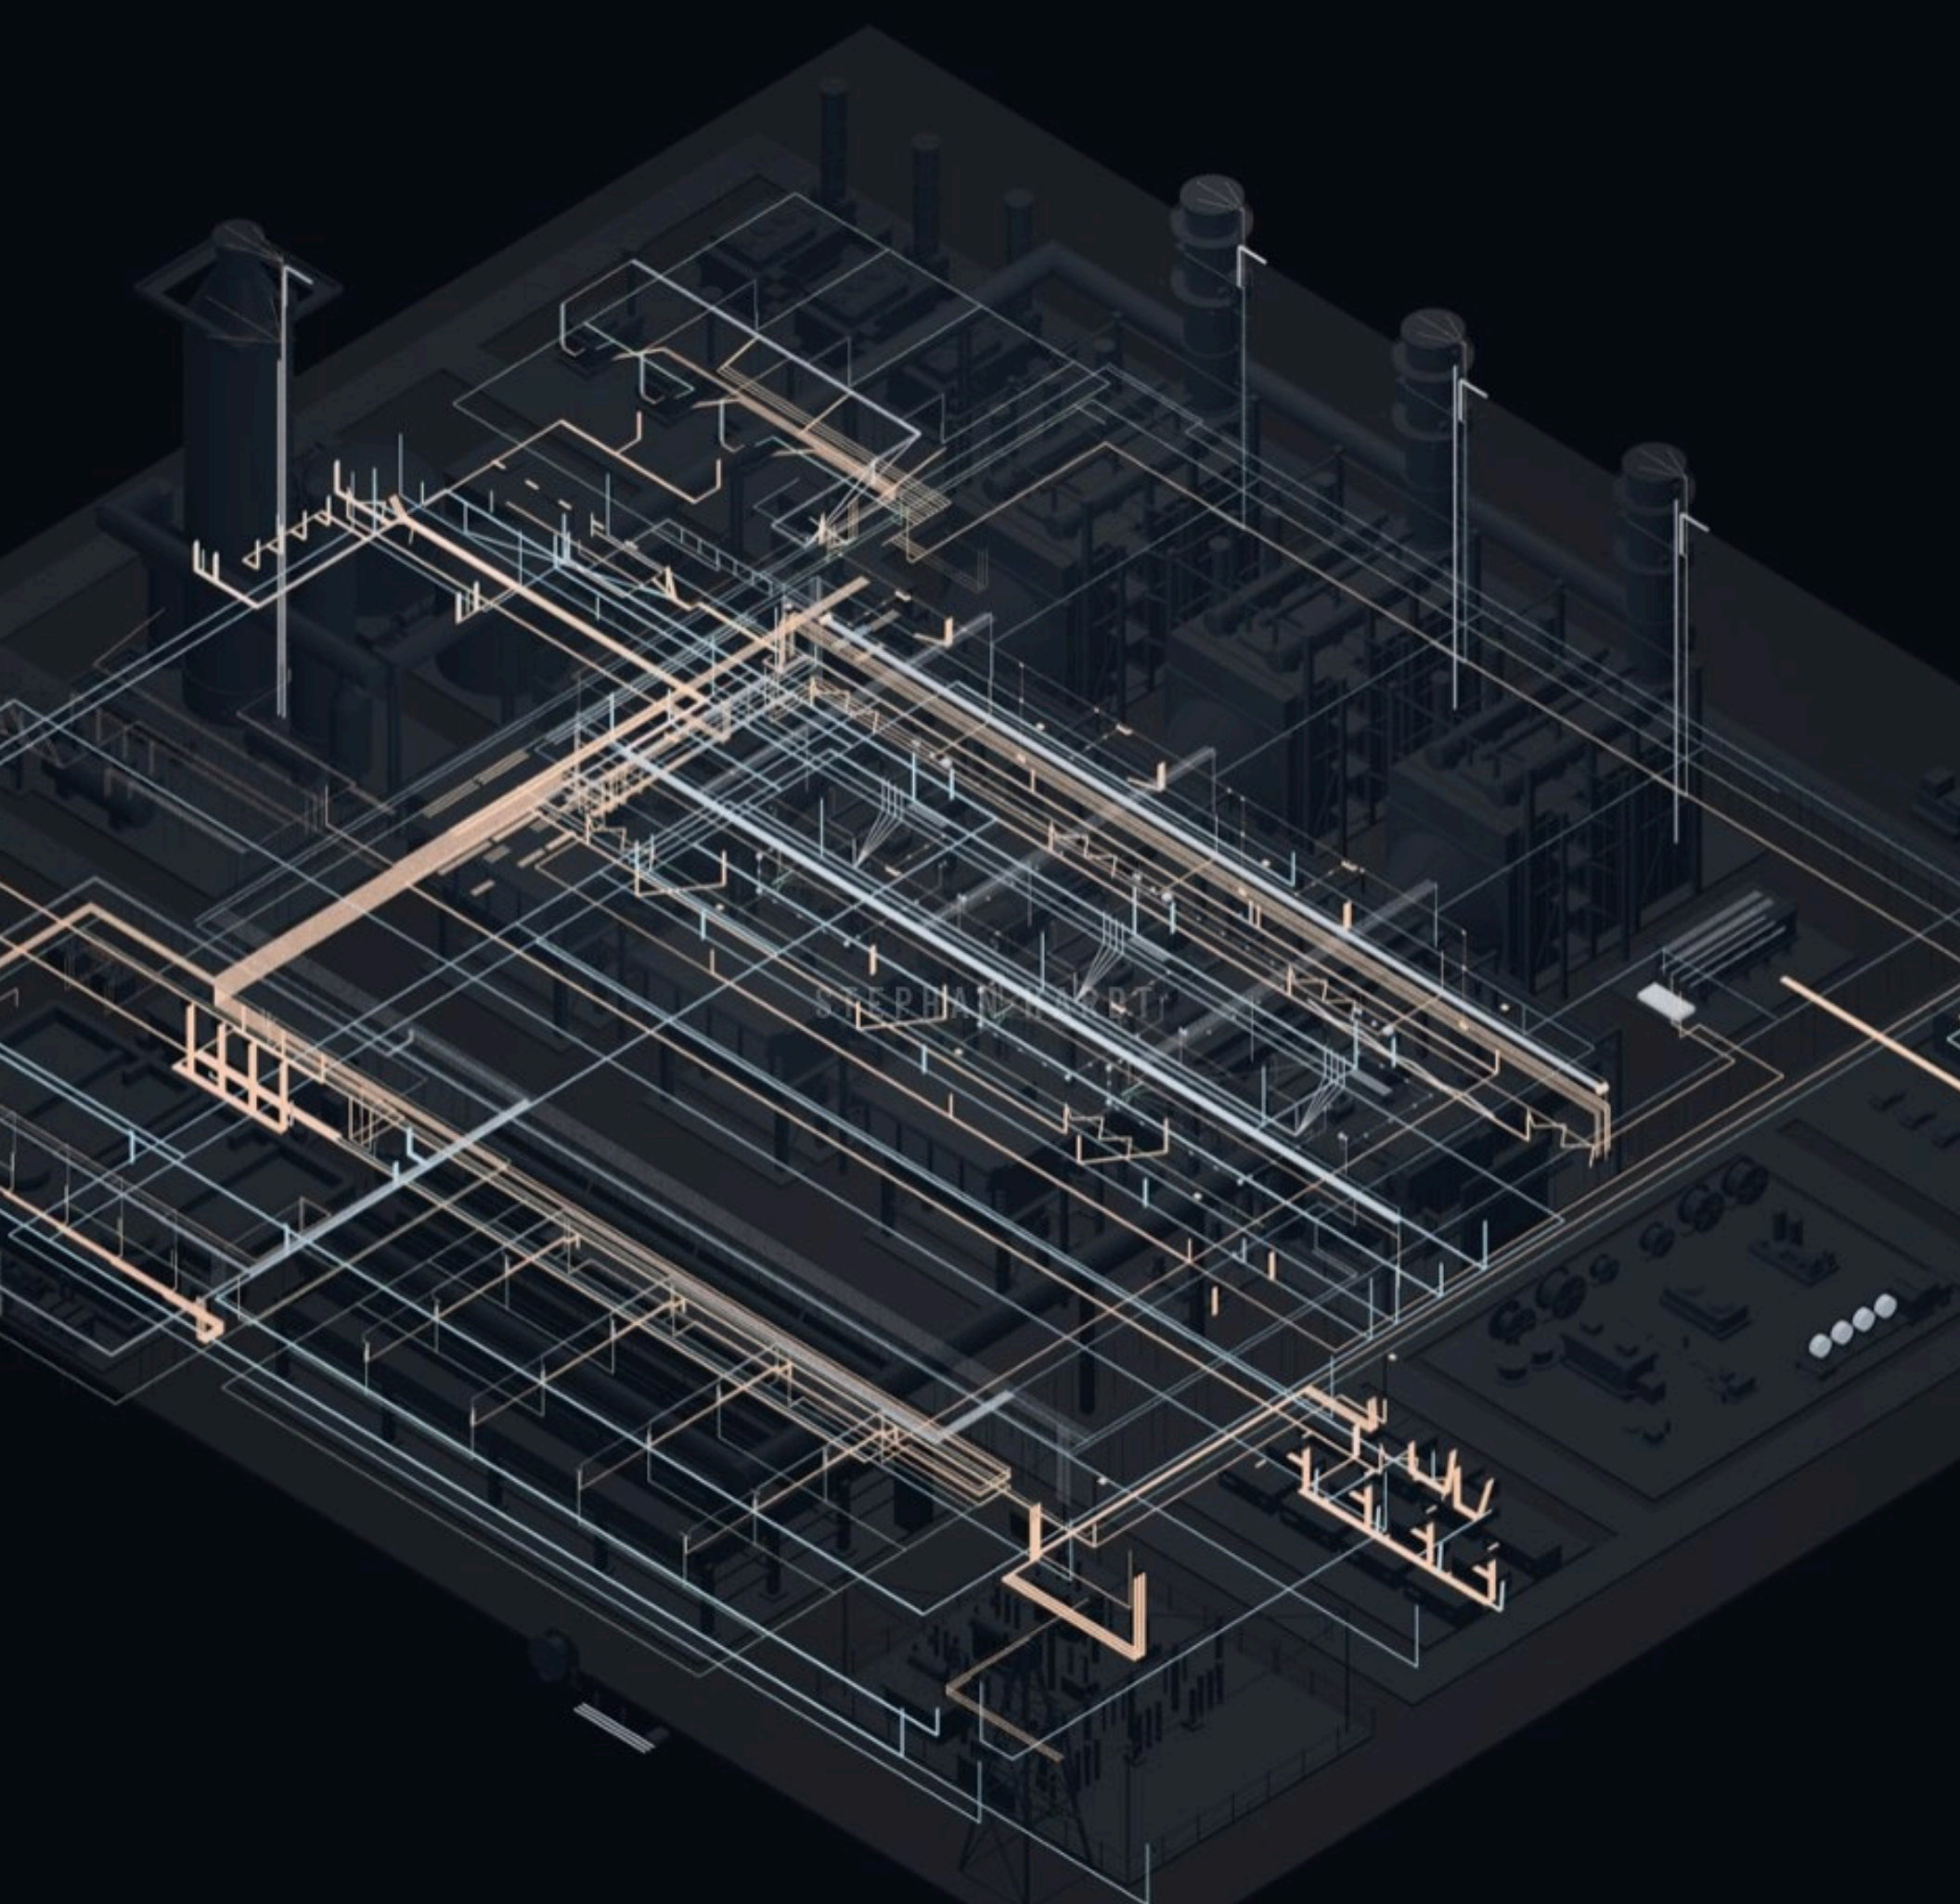

## TECHNICAL SCOPE

# ONE CONNECTED CABLE SCOPE

### MV / HV POWER

Plant feeders, transformer ties, collection

### CONTROL & INSTRUMENTATION

CT/VT, breaker control, shielded pairs and triads

### LV POWER & AUXILIARIES

Motors, panels, Machine FLEX VFD cable

### GROUNDING & BARE

Ground grid and equipment bonds

### HAZARDOUS & SPECIALTY

Classified areas and DC circuits



# ONE SUPPLIER. EVERY CIRCUIT.

|                                                                                                                                                                                            |                                                                                                                                                                                            |                                                                                                                                                                                                    |                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>HV 69-345 KV</b><br>XLPE from step-up transformer to switchyard<br>AEIC CS9 · ICEA S-108-720       | <br><b>MV 5-35 KV</b><br>Feeders to pumps, fans, compressors and GT start-up<br>UL 1072 · ICEA S-93-639 | <br><b>LV POWER &amp; VFD</b><br>MCC feeders, VFD motor leads, lighting<br>UL 1277 TC-ER · UL 44 XHHW-2         | <br><b>C&amp;I CONTROL</b><br>Shielded pairs, triads and thermocouple extension<br>UL 2250 ITC · UL 13 PLTC |
| <br><b>FR FIRE-RATED</b><br>2-hour circuit integrity for fire pumps, alarms, ESD<br>UL 2196 · IEC 60331 | <br><b>FO FIBRE</b><br>Relay links, plant network and OPGW<br>ICEA S-87-640 · IEEE 1138               | <br><b>MX MODULAR</b><br>Flexible, oil-resistant cable and harnesses for skids<br>Class K stranding · UL 1277 | <br><b>GR GROUNDING</b><br>Bare copper grid and equipment bonding<br>IEEE 80 · IEEE 665                   |



# CABLE IN DETAIL



**HV single-core XLPE.** Triple-extruded insulation, copper wire screen and water-blocking under a tough PE jacket.




**MV three-core** for large auxiliary motors



**Circuit integrity** for fire and shutdown circuits



**Segregated trays** by voltage class

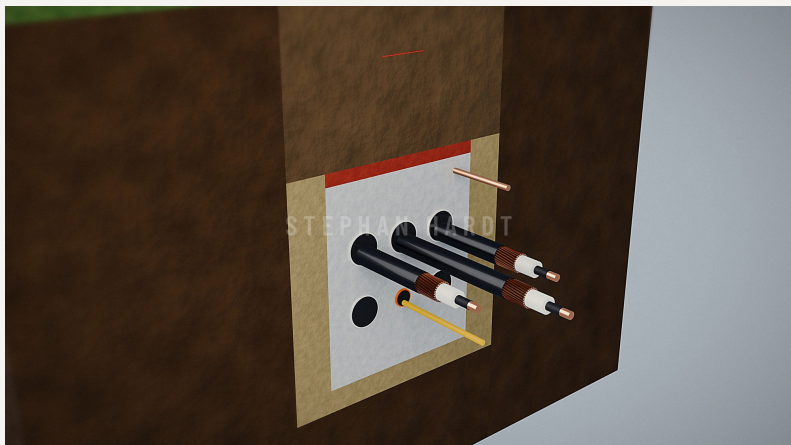

**Duct bank** for HV runs to the switchyard



# BUILT TO NORTH AMERICAN SPECS

| Cable family              | North American standards     | International         |
|---------------------------|------------------------------|-----------------------|
| HV 69–345 kV              | AEIC CS9 · ICEA S-108-720    | IEC 60840 · IEC 62067 |
| MV 5–35 kV                | UL 1072 · ICEA S-93-639      | IEC 60502-2           |
| LV power & VFD            | UL 1277 TC-ER · UL 44 XHHW-2 | IEC 60502-1           |
| Control & instrumentation | UL 2250 ITC · UL 13 PLTC     | EN 50288-7            |
| Fire-rated                | UL 2196 circuit integrity    | IEC 60331             |
| Flame propagation         | IEEE 1202 · UL 1685          | IEC 60332-3           |
| Fibre & OPGW              | ICEA S-87-640 · IEEE 1138    | ITU-T G.652.D         |
| Grounding                 | IEEE 80 · IEEE 665           | IEC 61936-1           |

CONFIRM LISTINGS PER PRODUCT DATASHEET





# BUILT FOR POWER THAT SHIPS IN A CONTAINER

## PRE-TERMINATED

Cut, terminated, tested and labelled in the factory

## FLEXIBLE

Fine stranding and tight bend radii for dense skids

## VIBRATION-PROOF

Built for engines and aeroderivative packages

## SITE-RATED

Oil-, fuel- and sunlight-resistant jackets

DESIGN

CUT &  
TERMINATE

TEST & LABEL

PLUG IN ON SITE


RENDERED ILLUSTRATION

25



MODULAR GAS POWER

EVERY PACKAGE NEEDS CABLE

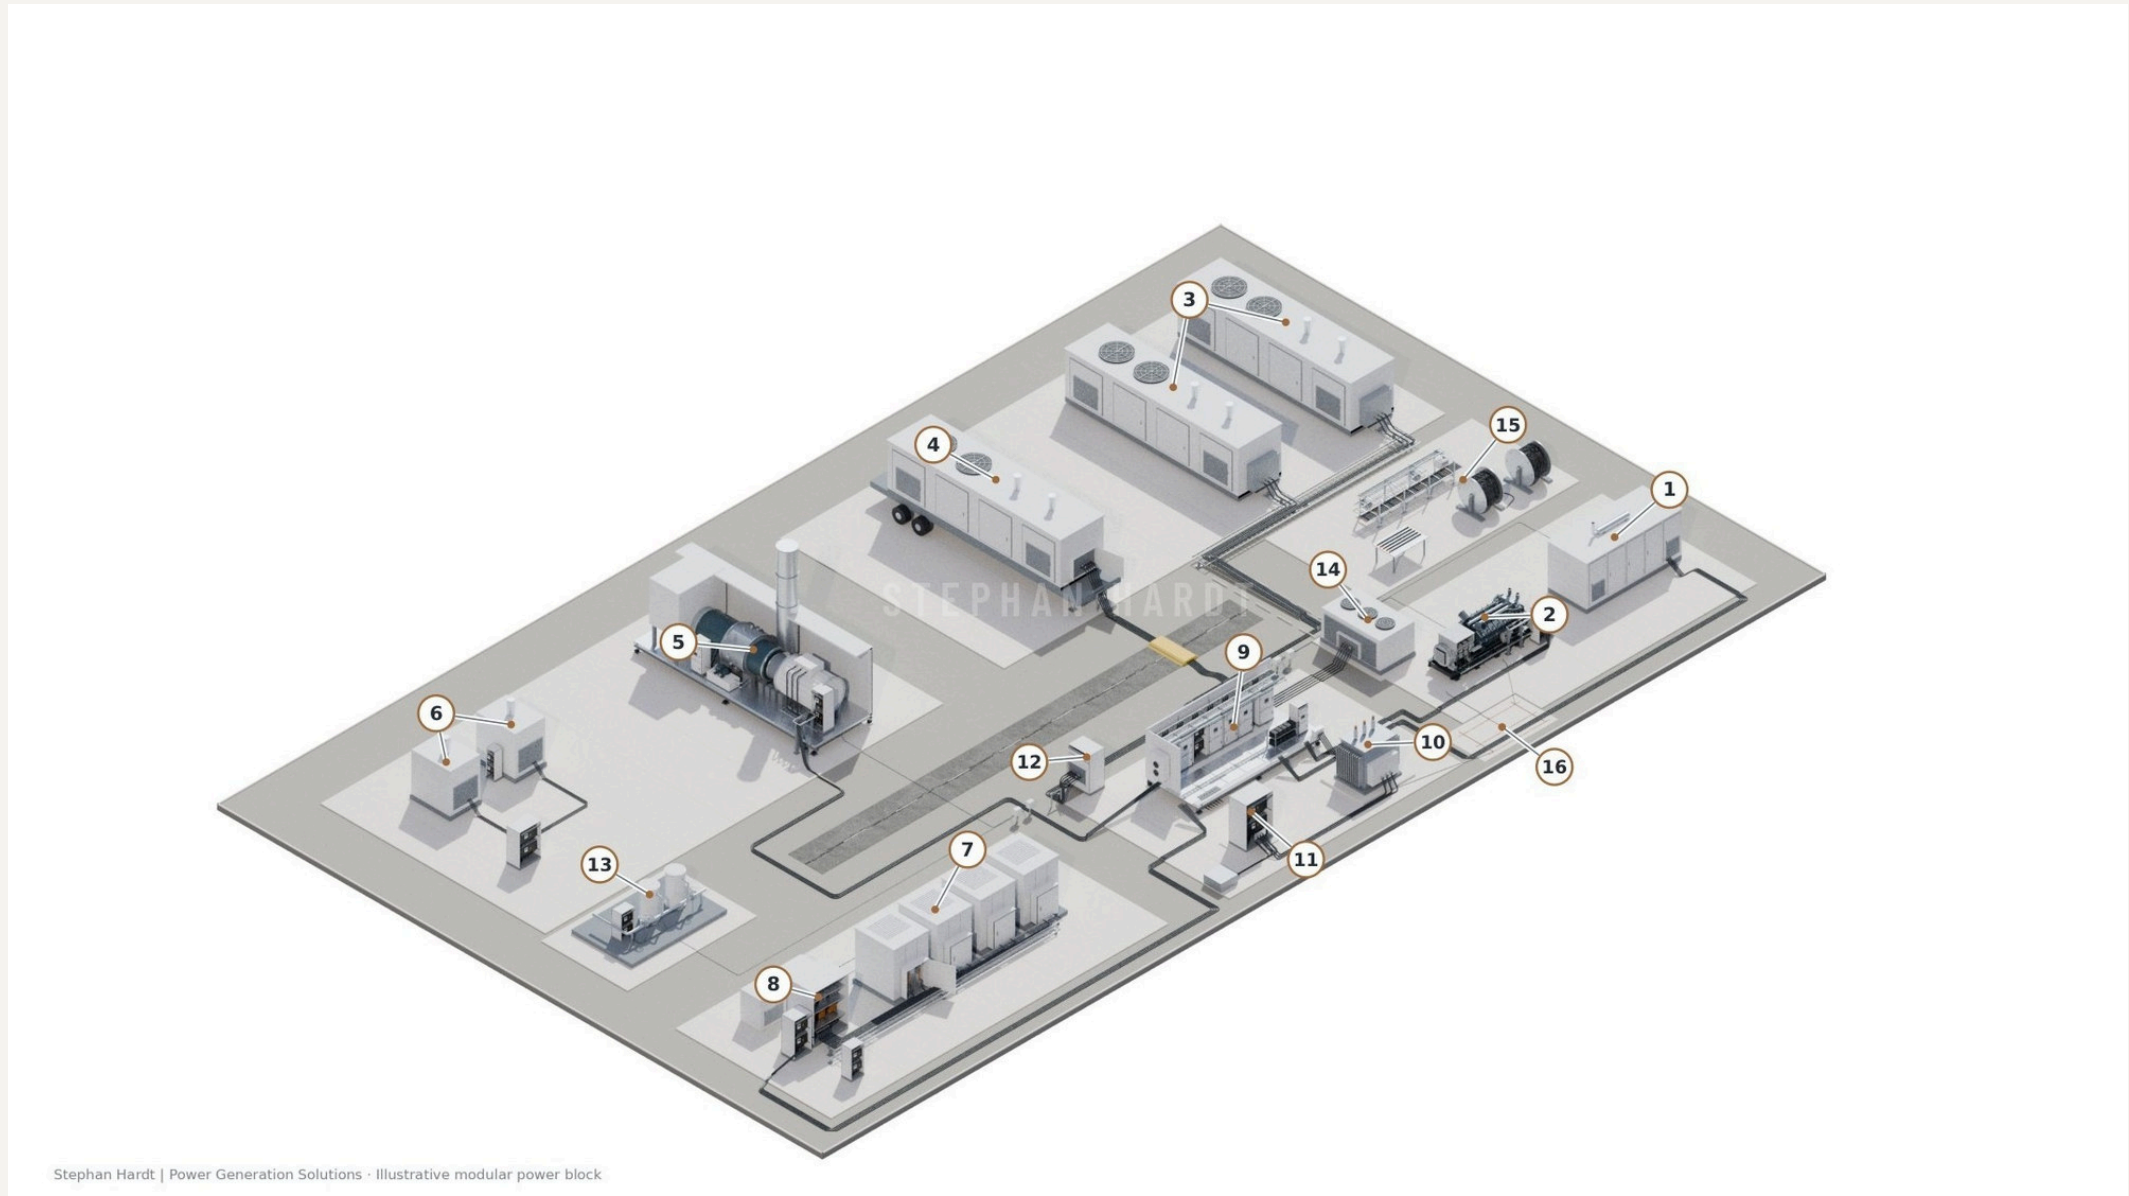

- 1-4 Gas gensets: enclosed, open, containerized, mobile
- 5 Packaged gas turbine
- 6-8 Microturbines, fuel cells and inverters
- 9-11 E-house, step-up transformer, MV tie-in
- 15 Cable reels and preparation area
- 16 Grounding grid and bonding

# HOW WE BACK THE CHANNEL

01

## SPEC SUPPORT

Cable sizing, derating and spec reviews for EPCs and OEMs

02

## CUT-TO-LENGTH

Drum lengths planned against the cable schedule

03

## HARNESS KITS

Pre-terminated, labelled kits for skids and panels

04

## STOCKING PROGRAM

Core control and power SKUs held at [Anixter/Wesco locations]

05

## PROJECT LOGISTICS

Drum tracking and sequenced site deliveries

06

## FIELD SUPPORT

Pulling calcs, termination and commissioning tests





## VALUE PROPOSITION

# ACCELERATING TIME TO POWER

### LESS INSTALLATION TIME

Prefab and standard designs across projects

### MATERIAL READINESS

Reel IDs, kits and sequenced delivery

### SUPPLY CERTAINTY

Forecasts tied to a confirmed supply plan

### EXECUTION SPEED

Earlier decisions and repeat designs




# 03 WINNING TOGETHER

PROJECTS WORTH A JOINT REVIEW

PACKAGE BUILDERS AND PANEL SHOPS

JOINT OPERATING MODEL

DECISIONS FOR TODAY

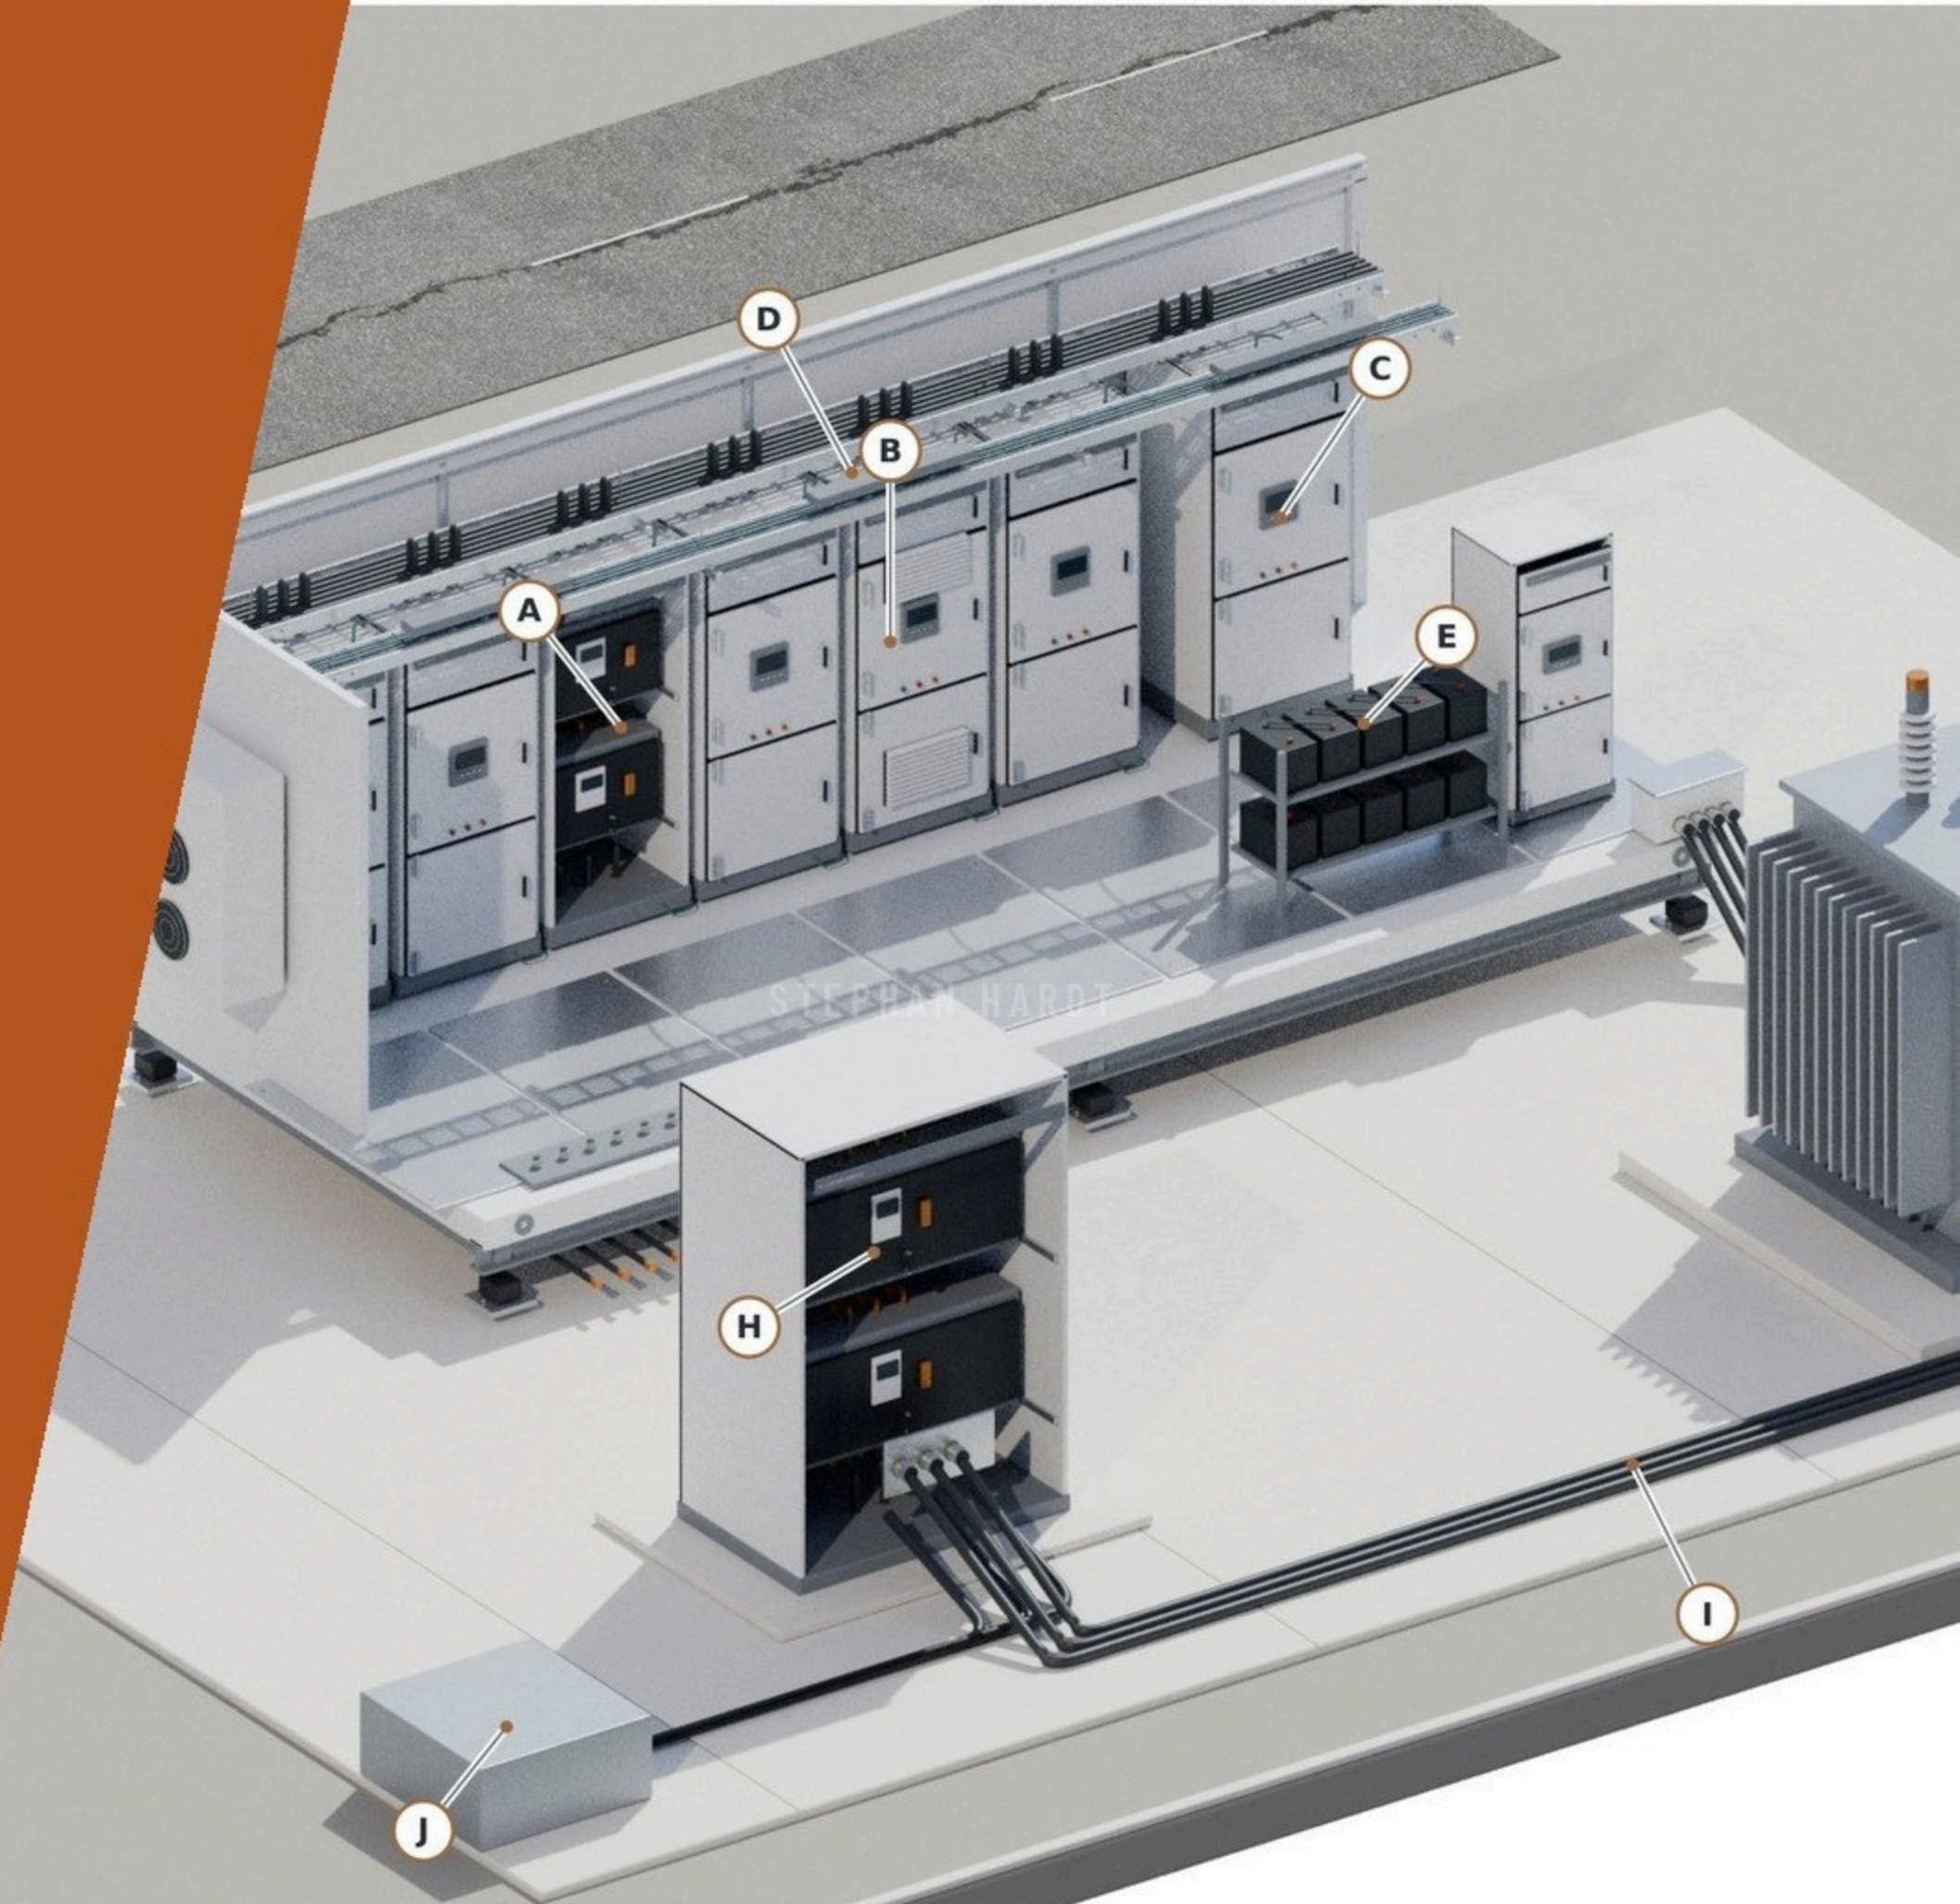



PUBLIC PROJECT SIGNALS


PROJECTS WORTH A JOINT REVIEW

| Project · program     | Public evidence                                                                       | Joint review question                                                   |
|-----------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| CPV Basin Ranch, TX   | 1,350 MW CCGT, construction under way                                                 | Who buys the remaining electrical packages?                             |
| Homer City, PA        | Up to 4.4 GW under construction; Kiewit, GE Vernova                                   | Which site and OEM packages remain open?                                |
| NRG Texas Energy Fund | Three projects, 1.5 GW, financed construction program                                 | Which units and packages still need supply?                             |
| VoltaGrid             | 2.3 GW Oracle fleet; 1.5 GW, 300-engine order for delivery by 2028                    | Where does internal wiring split from site collection?                  |
| Entergy · IOU         | 16 gas units, ~14 GW in LA, TX, MS, AR; 5.8 GW building, incl. Meta’s Richland Parish | S&L/TIC/Mitsubishi consortium on 8 units: who buys BOP and field cable? |

Public status as of the Oct 2 source review. Anixter/Wesco access to be confirmed.

PACKAGE BUILDER OPPORTUNITY

# FROM FIELD CABLE INTO THE PACKAGE

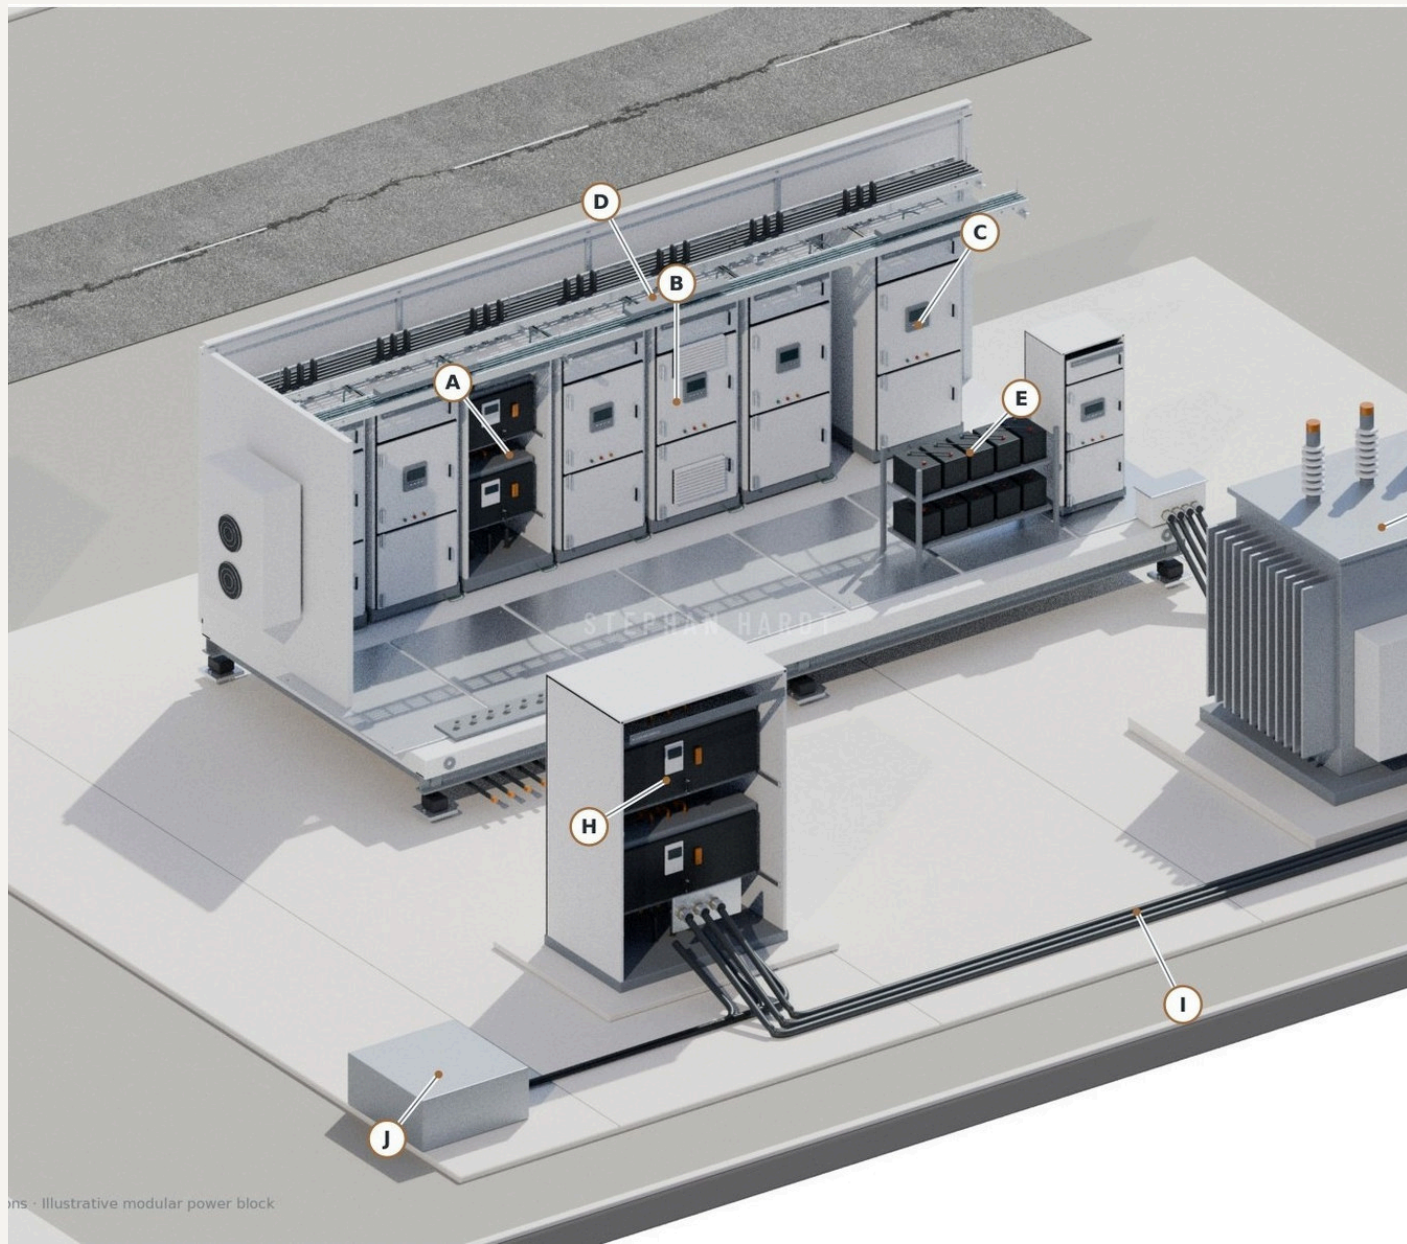

## E-HOUSE • POWER ENCLOSURE

**Powell Industries** (Anixter/Wesco global account), Fibrebond (Eaton), TAS, EAS North Carolina

MV EPR switchgear ties, Machine FLEX, tray and panel wire

## PANEL • INTEGRATION SHOP

**Panelmatic Houston**, industrial HVAC and BMS panel shops

AWM panel wire, SAFEGUARD cord, control and instrumentation

## MOBILE • MODULAR POWER

**VoltaGrid**

DLO, MV and tray cable for generator, collection and auxiliaries

ALL BOUGHT BEFORE THE EPC FIELD-CABLE RFQ



JOINT OPERATING MODEL

# TARGET, OWN, STOCK AND QUOTE, ACT

## SOUTHWIRE BRINGS

- 386 tracked projects in 40 states
- Spec support and plant-wide cable scoping
- Named EPC and OEM relationships
- Application guides and line cards

## ANIXTER/WESCO BRINGS

- Global accounts, Powell Industries and more
- Local stocking and fulfillment
- Modular OEM Solutions coverage
- Quotes, logistics and access in TX, OH, IN

1 TARGET THE ACCOUNT

2 OWN THE RELATIONSHIP

3 AGREE STOCK & QUOTE

4 ACT TOGETHER

## FIRST 90 DAYS

# A SMALL SHORTLIST WITH NAMED NEXT ACTIONS

### Days 0–30

#### EXCHANGE AND SELECT

Swap account lists; pick 5–10 projects or builders

Output: lead contact, package scope, open questions

### Days 31–60

#### CALL AND QUALIFY

Joint calls and technical qualification

Output: buyer, spec, timing and quote route

### Days 61–90

#### PROPOSE SUPPLY

Supply and inventory proposals where qualified

Output: written next action and delivery plan

**START WITH THE 17 PRIORITY PURSUITS AND THE PACKAGE BUILDERS WE BOTH CALL ON**



# THREE DECISIONS FOR TODAY

1

## CONFIRM TARGETS

The first 3–5 package builders, OEMs or projects to pursue jointly in TX, OH and IN, starting with Powell

2

## ASSIGN OWNERSHIP

Who leads each account, who stocks and who quotes, for every builder we both call on

3

## BOOK THE FIRST CALLS

2–3 joint customer meetings with panel builders and OEM packagers before year-end

**Why it works:** demand is durable, Southwire has real PowerGen traction, and we already call on the same package builders. A joint plan turns that overlap into an advantage.





# Southwire®

POWER GENERATION SOLUTIONS

***FASTER TIME TO POWER. LOWER EXECUTION RISK.***

***ENGINEERED FOR LONG-TERM RELIABILITY.***

— WE DELIVER POWER RESPONSIBLY —

*[powergen@southwire.com](mailto:powergen@southwire.com)*



APPENDIX

SOURCES AND QUALIFIERS

| Figure                                | Source                                                                                                                                                                            |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Load growth, data centers             | Grid Strategies, National Load Growth Report, 2025 (forecast)                                                                                                                     |
| 378 GW pipeline, 52 GW building       | Global Energy Monitor, Aug 2026; early-stage proposals will not all be built                                                                                                      |
| Turbine lead times                    | S&P Global Commodity Insights, May 20, 2025                                                                                                                                       |
| OEM backlogs and orders               | GE Vernova 2Q'26; Siemens Energy Q3 FY26; Utility Dive, Aug 13, 2026 (MHI); Caterpillar 2Q'26; Eaton, Jun 2025; POWER Magazine on VoltaGrid (Oracle, Oct 2025; Vantage, Feb 2026) |
| Cable opportunity, OEM, EPC, projects | Southwire PowerGen commercial priorities model, Sep 11, 2026: assumed rates and probabilities, no statistical confidence interval                                                 |
| Register, owners, geography, buyers   | Southwire PowerGen capacity and buyer strategy, Oct 2026 (register snapshot Sep 11, 2026)                                                                                         |
| Progress and coverage                 | Southwire internal, 2026                                                                                                                                                          |
| Plant and yard renders                | Southwire PowerGen plant model: conceptual and illustrative, not engineering data                                                                                                 |