



NICA · FOR ELECTRICAL CONTRACTORS


# POWER GENERATION SOLUTIONS

**CABLE, KITS AND ASSEMBLIES FOR THE CREWS THAT  
BUILD AND CONNECT GENERATION**

One cable scope from the switchyard to the control panel: medium-voltage feeders, tray and control cable, grounding, and prepared kits that arrive ready to land.


## ACCELERATING TIME TO POWER™

Stephan Hardt · Director, Power Generation Solutions  
[stephan.hardt@southwire.com](mailto:stephan.hardt@southwire.com) · [powergen@southwire.com](mailto:powergen@southwire.com)

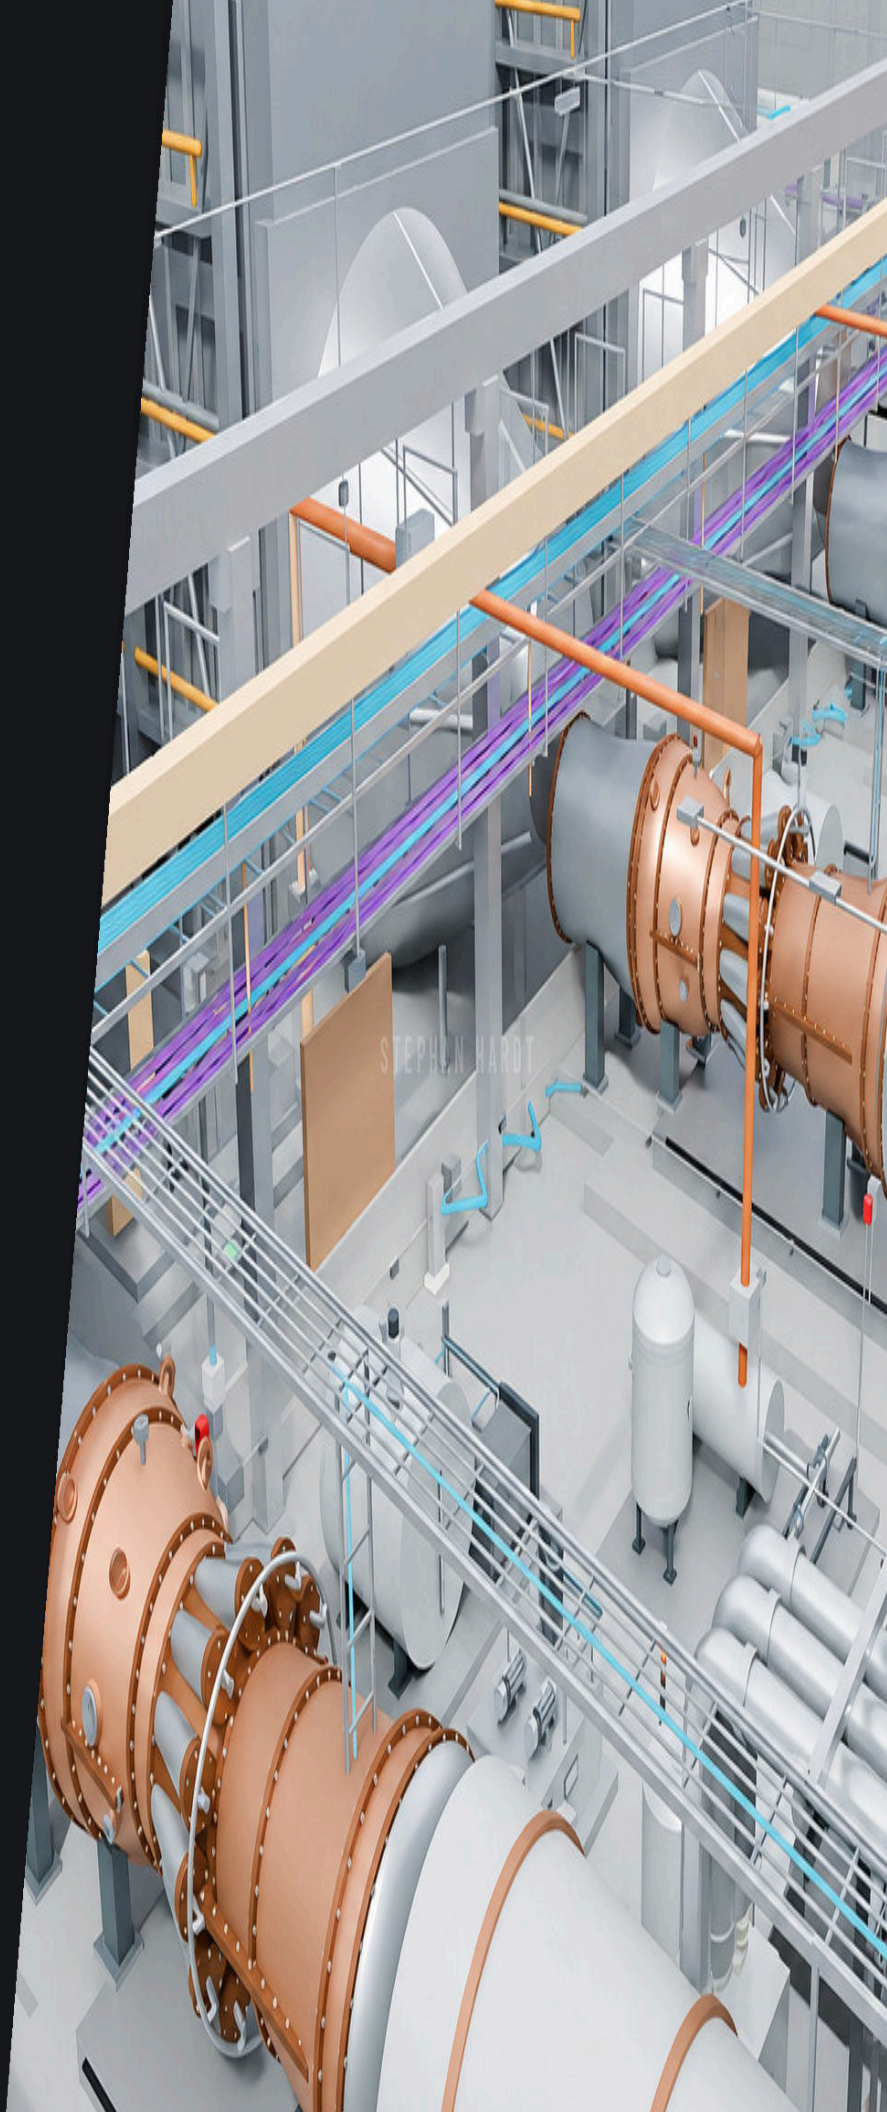

THE PLANT IS THE MODEL

# 16 ZONES. 75 EQUIPMENT NODES. ONE CONNECTED CABLE SCOPE.

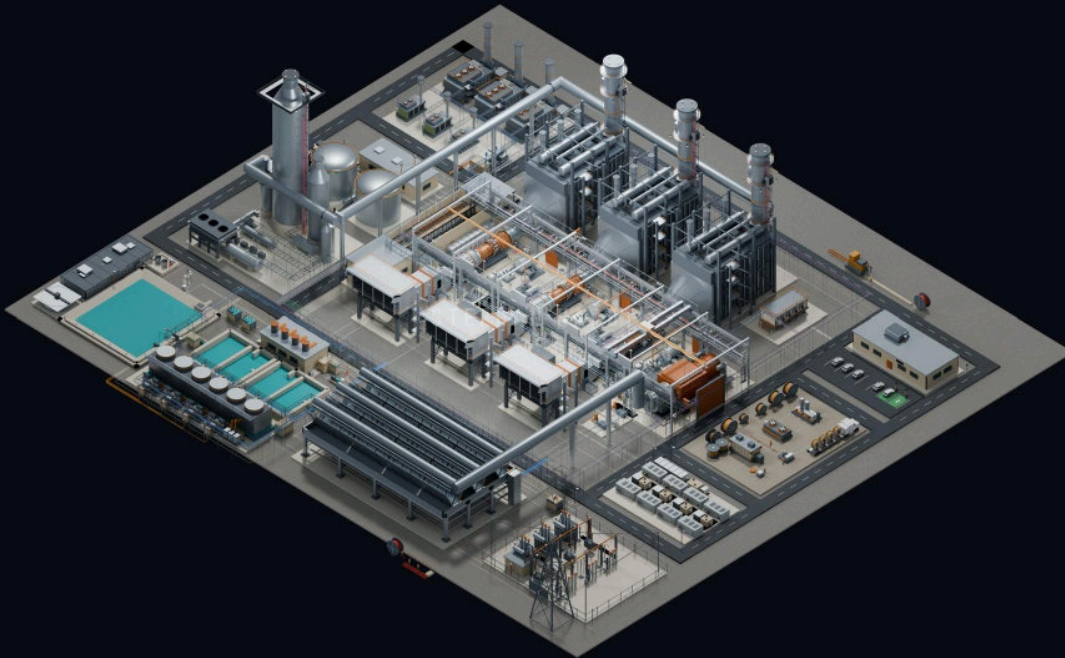

**01** Switchyard, GSU & grid tie

**04** Admin & control room

**07** Turbine hall

**10** Modular power yard

**13** Water treatment

**16** Cable corridor & MV

**02** BESS yard

**05** E-house

**08** GT air inlets

**11** Air-cooled condenser

**14** Carbon capture (CCS)

**03** Reel staging & prefab

**06** HRSG trains & stacks

**09** MCC, VFD & UPS room

**12** Chillers & cooling towers

**15** Gas metering

Every zone above is wired. The contractor's share of that scope runs from the switchyard to the last terminal block: feeders, tray cable, control and instrumentation, grounding, and the prepared kits and assemblies that shorten the work inside each enclosure.

## PLANT • EQUIPMENT • CABLE • DELIVERY

### WHY NOW

**378 GW**

US gas power in development, mid-2026

**52 GW**

under construction, the largest gas build in the world

**Up to 7 yrs**


quoted lead time for some large gas turbines

**< 1%**

of plant capex is wire and cable, on the critical path to first power

Sources: Grid Strategies 2025; Global Energy Monitor, Aug 2026; S&P Global Commodity Insights, May 2025; Southwire planning assumption for cable share. Early-stage proposals will not all be built.

# EVERY MEGAWATT TRAVELS THROUGH A CABLE

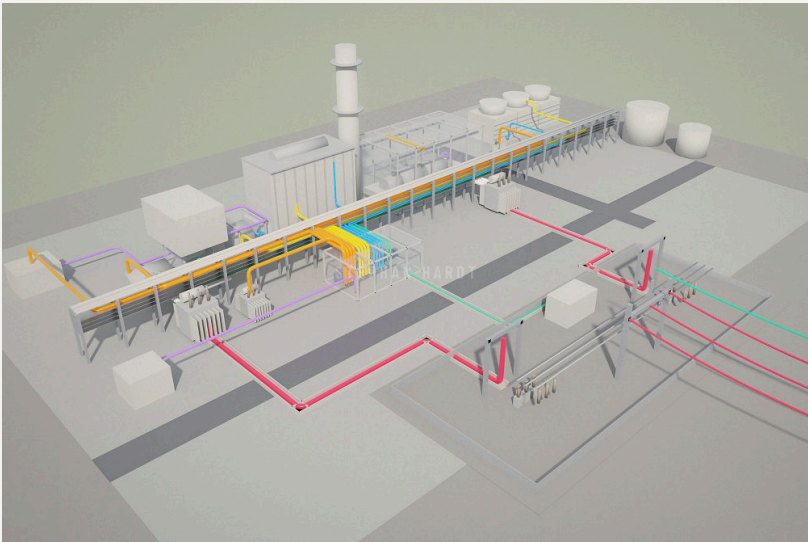

ILLUSTRATIVE 1x1 COMBINED CYCLE BLOCK - CABLE DIAMETERS EXAGGERATED

- 1 Control & instrumentation
- 2 LV power & VFD cable
- 3 Medium-voltage feeders
- 4 Fire-rated & specialty
- 5 High-voltage XLPE cable
- 6 Fibre optic
- 7 Overhead conductor & OPGW

WHAT THE SITE ASKS OF THE CABLE


| COMBINED CYCLE PLANTS |                                                             |
|-----------------------|-------------------------------------------------------------|
| HEAT                  | Routes beside turbines, HRSGs and steam lines               |
| DAILY CYCLING         | Frequent starts stress terminations and joints              |
| FIRE AND SMOKE        | Flame-retardant, low-smoke cable in halls and control rooms |
| ELECTRICAL NOISE      | Drives and switchgear next to DCS and protection            |

| MODULAR GAS POWER |                                                 |
|-------------------|-------------------------------------------------|
| COMPACT SKIDS     | Flexible cable with tight bend radii            |
| VIBRATION         | Fine stranding and secure glands for engines    |
| HARSH SITES       | Oil, fuel, sunlight and wide temperature ranges |
| SPEED TO POWER    | Pre-terminated, tested harnesses cut site hours |

WHY IT MATTERS ON SITE

One supplier across voltage classes means one spec review, one reel plan and one point of contact when the schedule moves. Cable inside packaged equipment is bought months before the field-cable RFQ, so the earlier the conversation, the more of the work can arrive prepared.

CABLE IN DETAIL

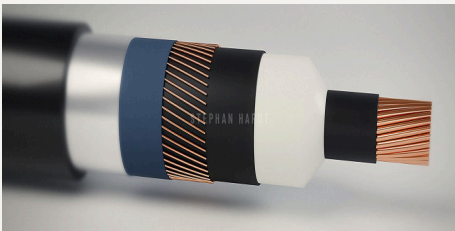

HV single-core XLPE. Triple-extruded insulation, copper wire screen, water-blocking under a PE jacket.



MV three-core for large auxiliary motors.



Circuit integrity for fire and shutdown circuits.

# ONE SUPPLIER. EVERY CIRCUIT.



### HV 69-345 KV

XLPE from step-up transformer to switchyard

AEIC CS9 · ICEA S-108-720



### MV 5-35 KV

Feeders to pumps, fans, compressors and GT start-up

UL 1072 · ICEA S-93-639



### LV POWER & VFD

MCC feeders, VFD motor leads, lighting

UL 1277 TC-ER · UL 44 XHHW-2



### C&I; CONTROL

Shielded pairs, triads and thermocouple extension

UL 2250 ITC · UL 13 PLTC



### FR FIRE-RATED

2-hour circuit integrity for fire pumps, alarms, ESD

UL 2196 · IEC 60331



### FO FIBRE

Relay links, plant network and OPGW

ICEA S-87-640 · IEEE 1138



### MX MODULAR

Flexible, oil-resistant cable and harnesses for skids

Class K stranding · UL 1277



### GR GROUNDING

Bare copper grid and equipment bonding

IEEE 80 · IEEE 665

## BUILT TO NORTH AMERICAN SPECS

| Cable family              | North American standards     | International         |
|---------------------------|------------------------------|-----------------------|
| HV 69-345 kV              | AEIC CS9 · ICEA S-108-720    | IEC 60840 · IEC 62067 |
| MV 5-35 kV                | UL 1072 · ICEA S-93-639      | IEC 60502-2           |
| LV power & VFD            | UL 1277 TC-ER · UL 44 XHHW-2 | IEC 60502-1           |
| Control & instrumentation | UL 2250 ITC · UL 13 PLTC     | EN 50288-7            |
| Fire-rated                | UL 2196 circuit integrity    | IEC 60331             |
| Flame propagation         | IEEE 1202 · UL 1685          | IEC 60332-3           |
| Fibre & OPGW              | ICEA S-87-640 · IEEE 1138    | ITU-T G.652.D         |
| Grounding                 | IEEE 80 · IEEE 665           | IEC 61936-1           |

CONFIRM LISTINGS PER PRODUCT DATASHEET

# BUILT FOR THE WAY CONTRACTORS BUILD



REEL STAGING AND PREFAB AREA - RENDERED ILLUSTRATION

Cable inside packaged equipment is bought months before the EPC issues its field-cable RFQ. The earlier the conversation with the package builder and the contractor, the more of the work can arrive prepared.

## 01 SPEC SUPPORT

Cable sizing, derating and spec reviews with the engineer of record before the cable schedule is frozen

## 02 CUT-TO-LENGTH

Reel lengths planned against the cable schedule, so pulls start without re-cutting

## 03 HARNESS KITS

Pre-terminated, labelled kits for skids, panels and enclosures

## 04 STOCKING PROGRAM

Core control and power constructions held locally through the channel

## 05 PROJECT LOGISTICS

Reel tracking and deliveries sequenced to the installation plan

## 06 FIELD SUPPORT

Pulling calculations, termination guidance and commissioning tests

## POWER THAT SHIPS IN A CONTAINER

### PRE-TERMINATED

Cut, terminated, tested and labelled in the factory

### FLEXIBLE

Fine stranding and tight bend radii for dense skids

### VIBRATION-PROOF

Built for engines and aeroderivative packages

### SITE-RATED

Oil-, fuel- and sunlight-resistant jackets

DESIGN


CUT & TERMINATE

TEST & LABEL

INSTALL ON SITE

# WHERE PREPARED CABLE FITS THE JOB

Six places on a generation project where cable, kits or assemblies can arrive prepared instead of being cut and dressed on site. Each is an application to evaluate against your drawings, not a catalog item.

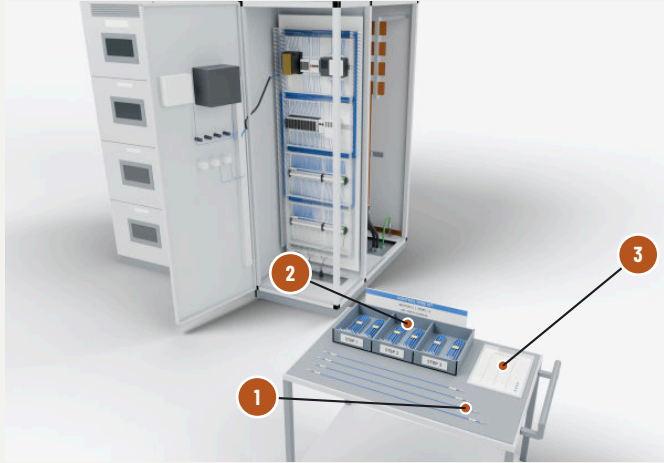

## SWITCHGEAR & CONTROL PANELS

- 1 Control conductors cut, stripped, ferruled and marked from the wiring schedule, identified at both ends.
- 2 Kits packed by cubicle or build step, so the bench holds what that section needs and nothing else.
- 3 Inspection points and test records agreed up front and tied to each kit label.

### FIRST STEP



Bring one representative wiring schedule and pick a pilot section.

## GENERATOR PACKAGES

- 1 Output leads cut, terminated and identified to the terminal-box arrangement.
- 2 Engine, regulator and remote-control wiring grouped by option and routed to a defined harness drawing.
- 3 A defined hand-off at the cable exit: what ships with the set, what the installer connects.

### FIRST STEP

Review the terminal-box and control-wiring scope of one generator platform.

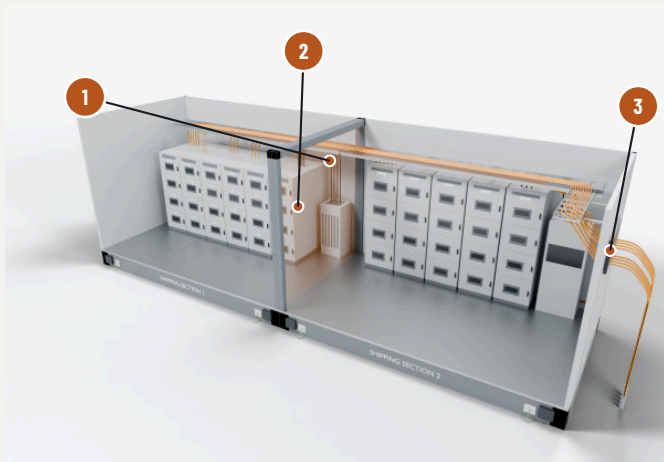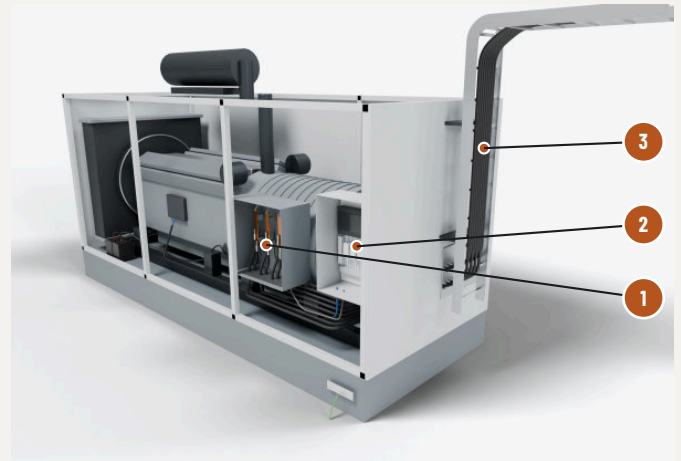


## E-HOUSES & MODULAR SKIDS

- 1 Cables routed and terminated within each shipping section before it leaves the factory.
- 2 Split-crossing feeders and control cables prepared, identified and staged for the reconnection sequence.
- 3 External feeders, cable transits and grounding pads defined as a clear site interface.

### FIRST STEP

Walk one skid's interconnection list and installation sequence.

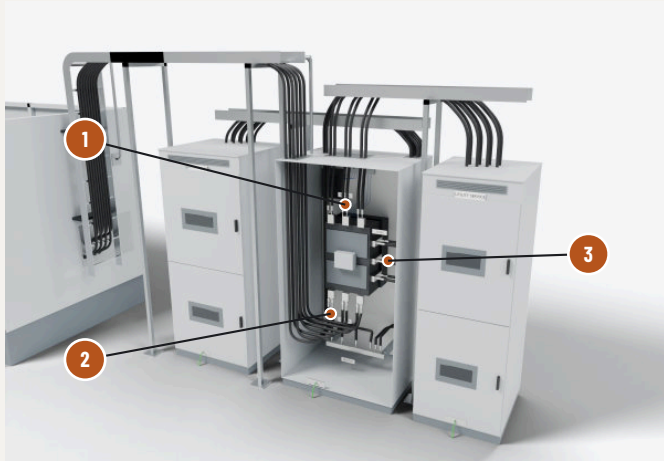

## TRANSFER & DISTRIBUTION EQUIPMENT

- 1 Normal-source, generator-source and load terminations documented so installer-supplied cable can be prepared consistently.
- 2 Generator feeders and a separately routed engine-start cable evaluated as one package.
- 3 Factory-supplied versus installer-supplied scope confirmed before the cable is cut.

### FIRST STEP



Define the scope split for one transfer-switch configuration.

## TEMPORARY POWER & TESTING

- 1 Portable single-conductor sets built to length, with connectors and matching identification at both ends.
- 2 Separate generator-input and load-bank ports; the load bank stays a configurable test load.
- 3 Coiled sets, labels and inspection records kept together for repeated deployments.

### FIRST STEP

Review duty, connectors and lead lengths for one test setup.

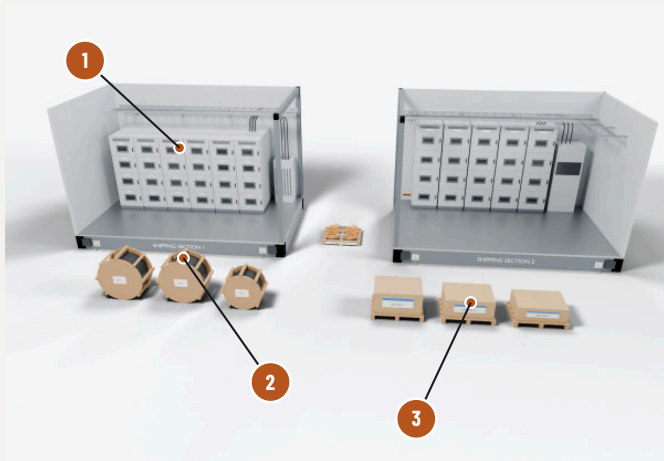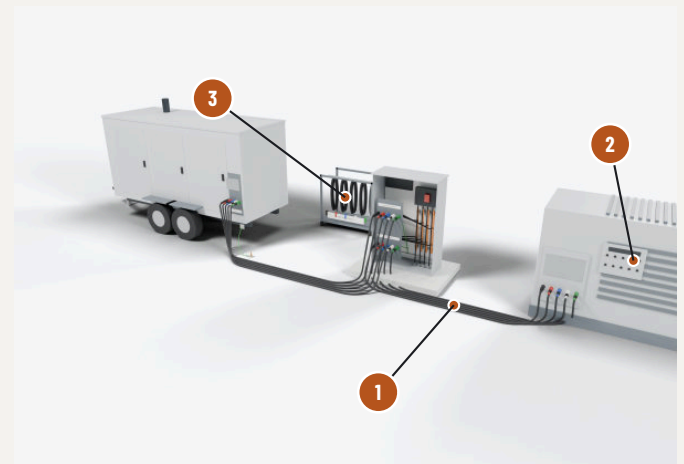

## STAGED SUPPLY & ASSEMBLY

- 1 Each module or section tied to its own cable and kit list from the drawings.
- 2 Reels and kits identified to the program, section and installation step.
- 3 Deliveries planned against the build sequence rather than one bulk shipment.

### FIRST STEP

Pick one program and define who prepares, who delivers and who installs.

Blue conductors, amber highlights and the kits shown are presentation devices, not conductor identification or qualified products. Ratings, sizes, clearances and terminations remain subject to application engineering.



# Southwire<sup>®</sup>

POWER GENERATION SOLUTIONS

***FASTER TIME TO POWER. LOWER EXECUTION RISK.  
ENGINEERED FOR LONG-TERM RELIABILITY.***

— WE DELIVER POWER RESPONSIBLY —

[powergen@southwire.com](mailto:powergen@southwire.com)

## VALUE PROPOSITION

# ACCELERATING TIME TO POWER

### LESS INSTALLATION TIME

Prefab and standard designs across projects

### MATERIAL READINESS

Reel IDs, kits and sequenced delivery

### SUPPLY CERTAINTY

Forecasts tied to a confirmed supply plan

### EXECUTION SPEED

Earlier decisions and repeat designs

## AT THE SHOW, OR AFTER

Bring one drawing: a wiring schedule, a cable schedule or a skid interconnection list. We will walk it together, mark what could arrive prepared, and agree a first pilot with named owners on both sides.

### Stephan Hardt

Director, Power Generation  
Solutions  
Southwire Company, LLC

[stephan.hardt@southwire.com](mailto:stephan.hardt@southwire.com)  
[powergen@southwire.com](mailto:powergen@southwire.com)

QR CODE  
placeholder  
(approved URL)

WE DELIVER POWER RESPONSIBLY

© 2026 Southwire Company, LLC. All rights reserved. Illustrations are conceptual and not engineering data. Confirm listings per product datasheet. Applications shown are concepts for evaluation, not qualified products.