



Southwire[®]

POWER GENERATION SOLUTIONS

***FASTER TIME TO POWER. LOWER EXECUTION RISK.
ENGINEERED FOR LONG-TERM RELIABILITY.***

— WE DELIVER POWER RESPONSIBLY —

stephan.hardt@southwire.com | +1 470-439-8488

Doubling down on generation means buying a lot of electrical scope, soon.

THE MOVE

1

NEWBUILD · 5.4 GW WITH GE VERNOVA AND KIEWIT-TIC

Four combined-cycle projects for ERCOT and PJM; first unit ~1.2 GW with a 2029 COD, the balance through 2032. Turbine and EPC capacity already secured.

2

ACQUIRED FLEET · 13 GW FROM LS POWER, CLOSED JAN 30, 2026

Eighteen gas plants across nine states, doubling the fleet to ~25 GW — eighteen sets of as-builts and aging cable systems inherited on one balance sheet.

3

BROWNFIELD ADDS · TEXAS ENERGY FUND AND PJM UPRATES

TEF-backed units at existing sites — Greens Bayou 443 MW, Cedar Bayou — plus ~2 GW of CT-to-combined-cycle conversion potential identified in PJM.

4

DATA CENTER COLOCATION · LOIs SIGNED, ~7.5 GW IN NEGOTIATION

Letters of intent with data-center developers, an agreement expected to be announced in 2026, and behind-the-meter configurations on the table.

WHERE CABLE DECIDES

A 2029 COD freezes its cable specification in the next 12–24 months. Insulation system, jacket latitude, raceway segregation and flame rating are still decisions today — by award, they are history.

Fleet-wide cable condition is measurable: field assessment, rejuvenation (150M+ ft on record) and one governed cable standard across eighteen sites instead of eighteen inherited ones.

Constrained brownfield without spare corridors is exactly where HV underground and factory-built modular power earn their place — capacity added inside a fence line you already own.

The same circuit schedule serves both sides of the meter: modular gas power on one side, UL-listed data center cable assemblies on the other. Both are existing Southwire lines.

THE PROBLEM

**On paper, electrical scope rarely sets the schedule.
In the field, it routinely does.**

1

Field labor

Terminations and pulls land in the same weeks as commissioning — absorbed as overtime and re-pulls, not as a line item anyone approved.

2

Supply window

The cable specification is written 12–24 months before anyone buys or reserves capacity. The market moves; the spec does not.

3

System risk

Cable sized for the drawing, not the installed geometry, fails in year eight — on an asset you still own and still owe.

Each of the three lands directly in the owner's math. A late electrical scope does not show up as a cable problem — it shows up as COD slip, contingency burn and lost IRR.

Next page: where cable actually moves LCOE and IRR — and where it does not.

Cable is a small line item with large coefficients.

LCOE and IRR decide every project. Five variables actually move — none of them is the purchase price.

LCOE — COST PER MWh

**CAPEX + O&M + Fuel
(lifetime, discounted)**

Lifetime MWh delivered (discounted)

Lower the top. Grow the bottom. De-risk the rate that discounts both.

IRR — RETURN ON THE PROJECT

$NPV = \sum CF_t \div (1 + IRR)^t = 0$

Most sensitive to COD date, capex certainty and availability — revenue that starts late is IRR you never get back.

1

SCHEDULE → COD

Cable sits on the energization critical path. Supply certainty and delivery sequencing protect the revenue start date — the largest single IRR lever.

2

RISK → DISCOUNT RATE

Evidence-based scope lowers contingency and financing risk: an estimate within 4% on footage was 26% off on copper — right in total, wrong where the money is.

3

CAPEX — THE NUMERATOR

Cable is under 2% of plant capex — purchase price barely moves the top line. Installed cost does: routing, reels, pulls, rework.

4

MWh — THE DENOMINATOR

Availability and asset life grow the bottom of the equation: cable health, rejuvenation and life extension keep MWh flowing.

5


COMMODITY VOLATILITY

Copper and aluminum exposure managed through supply strategy and hedging — capex certainty that lenders can underwrite.

Cable barely moves the numerator — it moves COD, risk and availability, where LCOE and IRR are decided.

Move cable from late procurement to a governed delivery system.

One owner basis travels from specification through turnover — while repeatable package interfaces become prefab / skid spines.

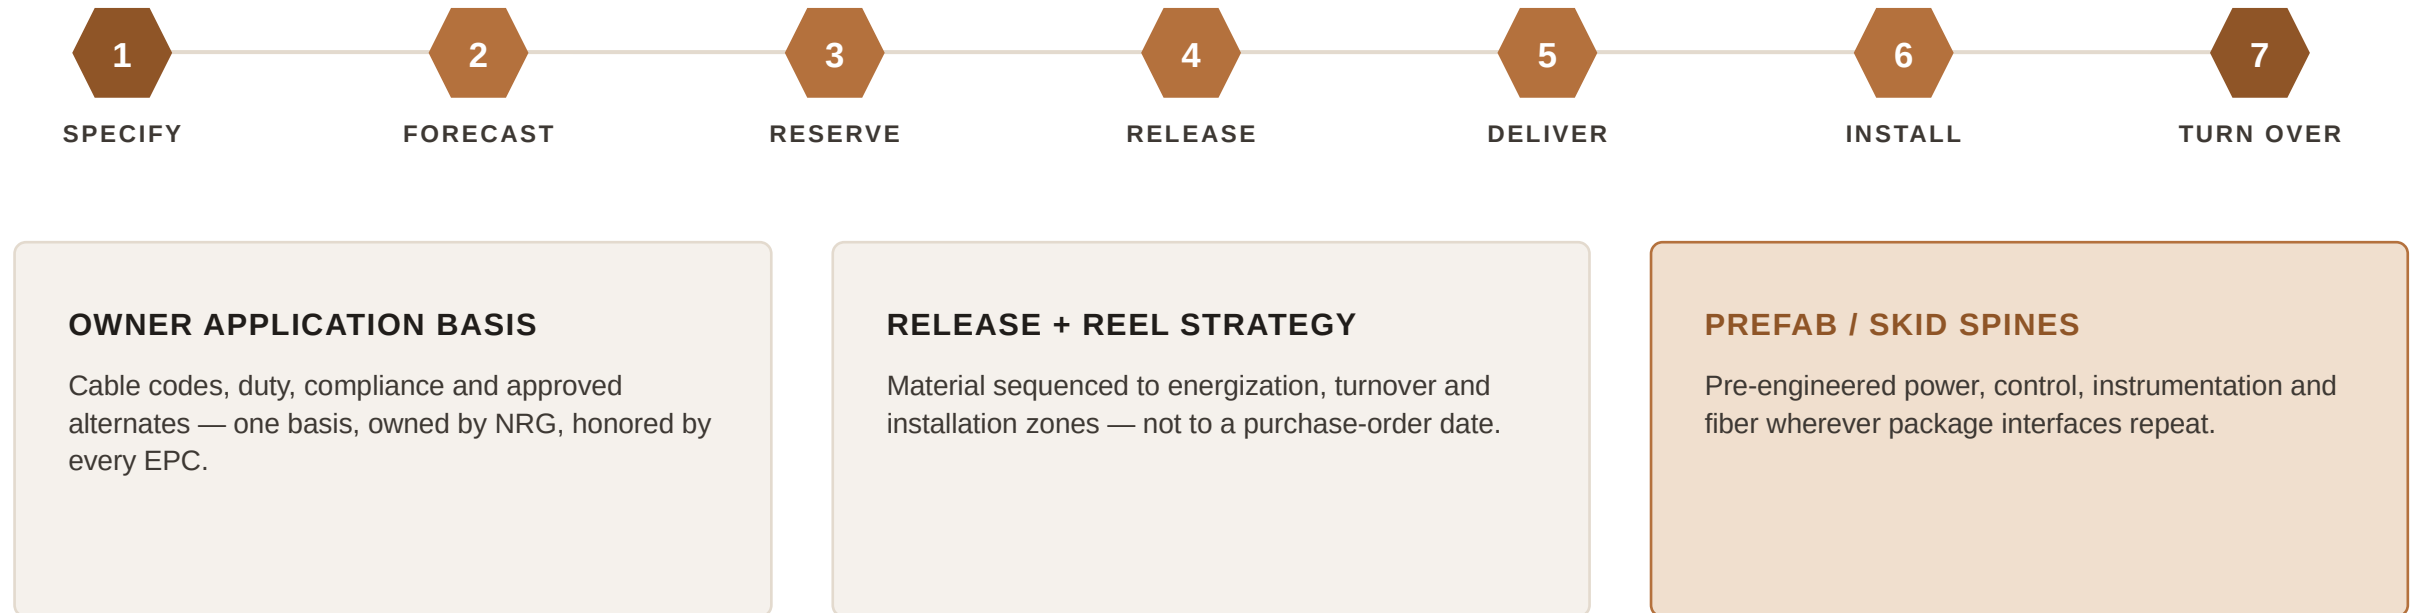

Field-engineer what is unique. Prefabricate what repeats.

We moved the field build into the factory.

One factory-built cable spine; the generation modules plug into it. Field man-hours per spine:

4,400

observed, site-built



~880

modeled, factory-built

~80% of field labor hours and ~50% of schedule, modeled — roughly \$334K gross per spine at \$95/hr.

READ THE FINE PRINT — WE MEAN IT

The prefabricated assembly costs more than site-built tray and strut. The argument is total cost of ownership over a forty-year asset life, not first cost. Gross labor avoided is not net savings — subtract the prefab premium, engineering, factory labor, freight, factory acceptance and commissioning. Prefabrication does not automatically remove an activity from the critical path. Every figure on this page comes from an adjacent market and stays illustrative until validated against your labor data.

We routed the entire plant before anyone asked for a quote.

96

SCHEDULE RECORDS

1,784

CIRCUITS ROUTED

2,478

PHYSICAL RUNS

1.14M


PROCUREMENT FT

563,091

LB COPPER

~0.50

LB CU / FT AVG

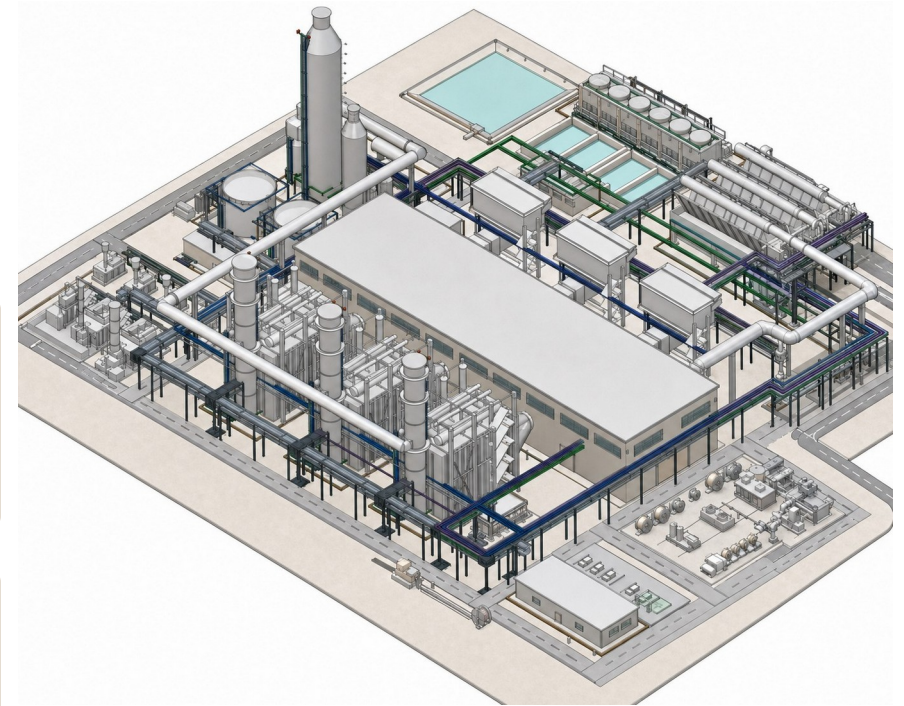

Routed 3D site model: plant zones → equipment duty → cable systems → application pages

Basis: NGCC master cable schedule Rev M21, geometry-governed. Specification numbers are Southwire family references — a stock number requires conductor sizing and is deliberately not shown. Concept, not for construction.

HV underground 69–500 kV · MV EPR 133% 5 / 15 / 25 / 35 kV · duct bank, direct buried and tray. Published Southwire record: 15M+ ft HV underground, zero in-service failures.

Full plant-zone map with per-zone cable applications: Appendix A (SK-120).

The same platform, in the language of each part of the program.

1

NEWBUILD · 5.4 GW, FIRST COD 2029

Protect COD and capital certainty.

Clarify electrical scope, interfaces and supply exposure before EPC decisions harden — while insulation, jacket and raceway are still choices, not history.

2

ACQUIRED FLEET · 18 PLANTS, 13 GW

One governed standard, not eighteen inherited ones.

Field assessment, rejuvenation and a fleet cable basis turn eighteen sets of as-builts into one measurable, fundable condition baseline.

3

BROWNFIELD · TEF UNITS + PJM UPRATES

Capacity inside the fence line.

HV underground and factory-built modular spines add megawatts where corridors are full — designed for installed cost, not purchase price.

4

COLOCATION · ~7.5 GW IN NEGOTIATION

Both sides of the meter, one schedule.

Modular gas power on one side, UL-listed data center assemblies on the other — existing Southwire lines, one circuit schedule, one delivery system.

Delivering value across the lifecycle: Develop → Design → Specify → Procure → Build → Commission → Operate → Maintain → Extend

A family-held American manufacturer, founded in 1950.

WHAT WE MAKE

High-voltage underground — 69–500 kV cable, accessories, installation engineering and field testing.

Medium & low voltage — 5–35 kV EPR and XLPE; 600 V power and control; tray-rated TC-ER.

Instrumentation & comms — shielded pairs and triads, thermocouple, industrial Ethernet and fiber.

Classified areas & circuit integrity — hazardous-location methods, MC-HL, two-hour rated cable, splice kits.


Modular & factory-built power — fine-strand flexible, VFD and tray cable; whips and job kits per module.

Data center assemblies — UL-listed, built, labeled, tested and drum-packed to your schedule.

Domestic manufacturing and auditable documentation that survives lender diligence.

WHAT WE DO

- High-voltage underground transmission services
- Field assessment services
- Cable rejuvenation — 150M+ ft on record
- SPEED services & storm activation team
- Contractor solutions professionals
- CableTechSupport™ services
- Reel tracking system
- Solutions University & project services

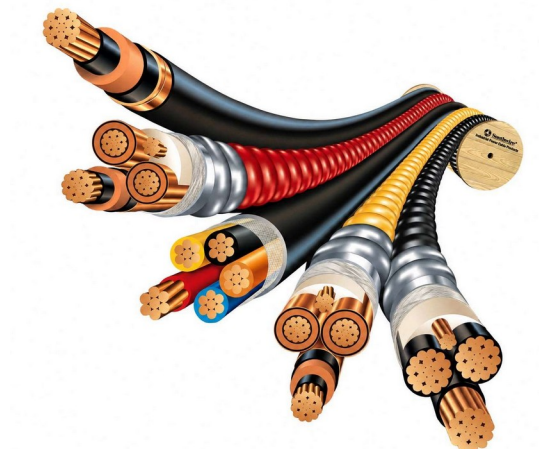

DISCOVERY

We would rather ask than tell.

- 01 Which electrical activity slipped first on your last build — and what was it waiting on?

- 02 What does a week of delayed COD cost, and who owns that number?

- 03 Across the four JV newbuilds — is the cable spec per-project, per-EPC, or a fleet standard?

- 04 Which of the eighteen acquired plants has an uprate study underway — and who runs the take-offs?

Right room: construction management, the field electrical superintendent, your EPC's electrical lead, procurement.

If cable is not where your schedule is lost, that is a useful answer and we will say so.

THE ASK

One hour. One site walk.

An active build, or an acquired plant with an uprate study. No pricing. No pitch.

You get a written read-back of where schedule and field labor are being lost on your electrical scope — including where we cannot help.

If the session shows nothing, it costs you an hour and we say thank you.

Stephan Hardt

Director, Power Generation Solutions · Southwire Company

stephan.hardt@southwire.com

+1 470-439-8488

Figures are illustrative or from adjacent markets, and identified as such. Nothing here commits price, lead time or scope.

1 SWITCHYARD, GSU BANK & GRID TIE

Overhead gen-tie conductors or HV/EHV underground cable, plus protection/control, fiber and grounding. POI boundaries, accessories and testing can gate energization.

ACSR/ACSS • HV/EHV XLPE • TC-ER control • fiber • bare copper

2 BESS YARD

Flexible BESS DC cable, MV collection, LV auxiliaries, controls and fiber. Repeated containers and PCS skids support a standardized DC/LV/control/fiber spine; MV collection follows the plant one-line.

RenewaFLEX 2 kV • DLO • MV-105 • XHHW-2/TC-ER • fiber

3 REEL STAGING, LAYDOWN & PREFABS / SKIDS

Zone-tagged reels, engineered cut lengths, spine sections and prefab / skid cable sets span all cable classes. Installation-sequenced staging reduces splices, scrap, handling and congestion.

MV-105 • XHHW-2 • TC-ER • VFD cable • MC-HL

4 ADMIN BUILDING & CONTROL ROOM

Low-voltage fire alarm, access control, HVAC/BAS and data join building power here. Separation protects life-safety and controls.

THHN/THWN-2 • Genesis fire alarm • Genesis access control • Genesis HVAC/BAS • fiber/data

5 E-HOUSE — MODULAR ELECTRICAL BUILDING

MV feeders, LV/VFD power, controls, fiber, station DC and panel wire. Defined E-house interfaces make it the spine head-end, with pre-engineered cable sets reducing field terminations.

MV-105 • XHHW-2/TC-ER • shielded VFD • PLTC/ITC • SIS

6 HRSG TRAINS & STACKS

Motor/valve power, lighting/small power, heat trace, thermocouple/RTD, CEMS and F&G/ESD cable serve HRSG skids. Pre-engineered harnesses simplify interfaces; heat and vertical runs still govern supports.

XHHW-2/TC-ER • MC-HL • PLTC/ITC F&G/ESD • thermocouple/RTD • heat-trace

7 TURBINE HALL — GAS & STEAM TURBINES


MV/LV/VFD power, generator/turbine controls, F&G/ESD, lighting/small power and festoon cable serve turbine-hall skids. A skid spine simplifies auxiliaries; generator output remains isolated-phase bus.

MV-105 • ARMOR-X MV VFD • XHHW-2/TC-ER • PLTC/ITC F&G/ESD • festoon

8 GT AIR INLET SECTION

Fan and heater power, controls, plus shielded pressure and temperature instrumentation. Repeated inlet houses support standardized drop assemblies tied to a common control interface.

TC-ER • shielded VFD • PLTC/ITC • thermocouple/RTD • fiber

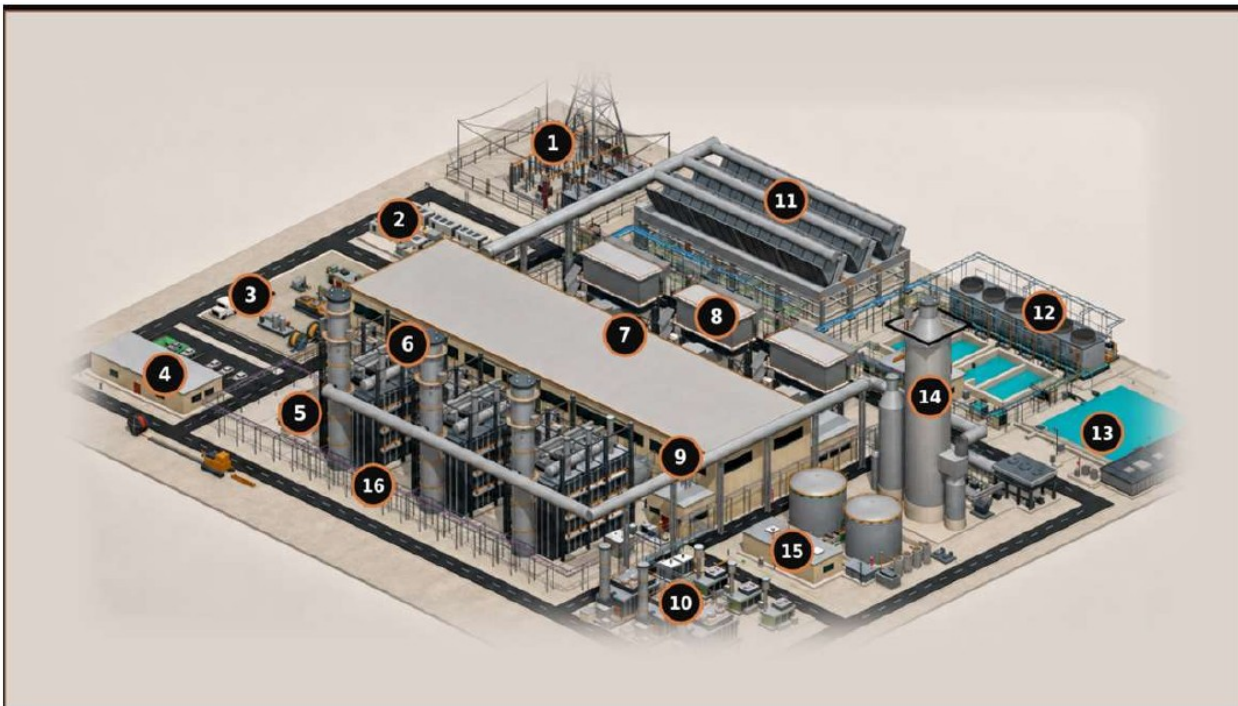

CABLE CLASSES CARRIED BY THE SCHEDULE

● MV 5–35 kV ● LV 600 V ● I&C / instrument ● DC 125 V
● Essential AC ● Fibre / network ● Grounding, bare

Bus duct and the overhead getaway are boundary only — excluded from all totals

HV UNDERGROUND 69–500 kV • MV EPR 133% S / 15 / 25 / 35 kV • DUCT BANK, DIRECT BURIED AND TRAY

Published Southwire record: 15M+ ft HV underground, zero in-service failures

96

SCHEDULE RECORDS

1,784

CIRCUITS ROUTED

2,478

PHYSICAL RUNS

1,136,255

PROCUREMENT FT

563,091

LB COPPER

~0.50

LB CU / FT AVG

SCHEDULE BASIS

QUANTITIES FROM THE NGCC MASTER CABLE SCHEDULE REV M21, GEOMETRY-GOVERNED. SPECIFICATION NUMBERS ARE SOUTHWIRE FAMILY REFERENCES — A STOCK NUMBER REQUIRES CONDUCTOR SIZING AND IS DELIBERATELY NOT SHOWN. ZONE NUMBERS ARE KEYED TO THIS VIEW.

9 MCC, MOTOR VFD & UPS ROOM

LV/MV motor feeders, VFD cable, essential AC/DC and fire-alarm/control CI wiring originate here where required. Outgoing sets simplify pulls; shielding and grounding still manage PWM stress and EMI.

MV-105 VFD • ARMOR-X VFD • Machine Flex VFD • DLO 2 kV • Circuit Defender

10 MODULAR POWER YARD — GENSETS, SIMPLE CYCLE, BTM, BLACK START, FUEL CELLS

MV/LV, control, fiber and grounding can be coordinated into prefabricated electrical spines for modular packages and skids. Consolidated terminations reduce field pulls and speed installation.

MV-105 • XHHW-2/TC-ER • DLO/RHH/RHW-2 • PLTC/ITC • fiber

11 ACC — AIR-COOLED CONDENSER

VFD power, controls, vibration/temperature instrumentation and fiber serve repeated fan cells. One trunk-and-drop electrical spine can repeat bay by bay across the ACC.

shielded VFD • XHHW-2/TC-ER • PLTC/ITC • vibration/RTD • fiber

12 CHILLERS & COOLING TOWERS

Chiller/pump/tower feeders, MV/LV VFD cable, HVAC/BAS controls and submersible cable serve packaged skids and cells. Modular spines speed installation; wet runs remain field-engineered.

MV-105 • ARMOR-X MV VFD • XHHW-2/TC-ER • PLTC/ITC HVAC/BAS • submersible pump

13 WATER TREATMENT, PROCESS TANKS & WASTEWATER POND

Pump/VFD power, TC-ER cable, MC-HL where classified, shielded instrumentation and submersible cable. Dosing and pump skids can use prewired power/control/instrument whips; wet-pit and submersible runs stay field-engineered.

XHHW-2/TC-ER • shielded VFD • MC-HL • PLTC/ITC • submersible

14 CCS — ABSORBER / REGENERATOR

LV/MV feeders, VFD cable, MC-HL, instrumentation, F&G/ESD, heat trace and fiber serve CCS packages. If OEM modules and skid interfaces are frozen, they can form a repeatable CCS spine; reserve corridor and tray capacity early.

MV-105 • ARMOR-X MV VFD • MC-HL • PLTC/ITC F&G/ESD • heat-trace

15 GAS METERING / METER HOUSE

One umbilical combines metering-skid power, F&G/ESD and instrumentation. Heat trace and sealing protect accuracy.

MC-HL power/control • ARMOR-X instrumentation • PLTC/ITC F&G/ESD • heat-trace • fiber

16 SITE CABLE CORRIDOR & MV DISTRIBUTION

MV backbone, LV auxiliaries, lighting/small power, controls, fiber and grounding cross site corridors. Route geometry, thermal design and pull limits shape cable and reel strategy.

MV-105 • XHHW-2 lighting/small power • TC-ER control • single-mode fiber • bare copper