
BOILERS: GREENFIELD & BROWNFIELD

One cable partner from the new HRSG to the package boiler to the outage that replaces a module: the same products, staged and pulled the same way.

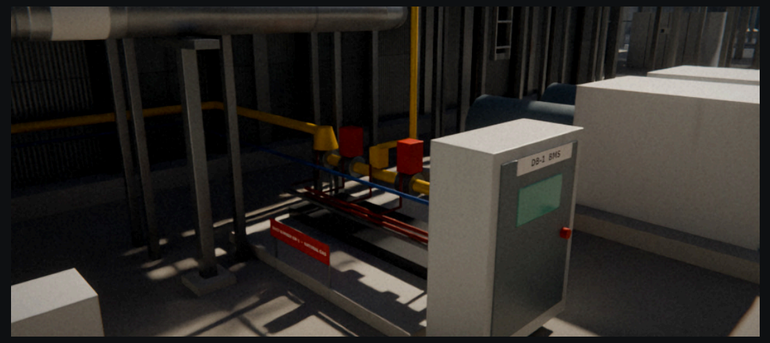

01 · GREENFIELD

HEAT-RECOVERY BOILER

Behind every gas turbine: three-pressure HRSG with SCR and a duct burner. Feed pumps at 13.8 kV, drum-level and thermocouple runs, burner management in a Class I Div 2 skid.

705
CABLES PER HRSG TRAIN

156,000
FT OF CABLE PER TRAIN



02 · GREENFIELD OR RETROFIT

GAS-FIRED PACKAGE BOILER

The plant's auxiliary boiler, the same package sold to industry: burner and BMS, gas train with double block and bleed, FD fan on a VFD, feedwater pumps, its own MCC e-house.

83
CABLES PER PACKAGE BOILER

42,000
FT OF CABLE



03 · BROWNFIELD

MODULE REPLACEMENT OUTAGE

An HP evaporator module lifted out through the opened roof. The cable work rides the same outage window, so it has to be staged, pre-terminated and pulled fast.

Outage
CRITICAL PATH

SIMpull
+ PRE-TERMINATED HARNESSES

CABLE BY BOILER TYPE

	MV-105 15 KV FEED PUMPS	TC-ER 600 V POWER & VFD	ARMOR-X MC-HL GAS TRAINS (C1D2)	CONTROL TC-ER	INSTRUMENTATION PLTC · TC EXT.	SIMPULL · REEL ROLLERS	PRE-TERMINATED HARNESSES
HRSG + DUCT BURNER	●	●	●	●	●	●	●
PACKAGE BOILER		●	●	●	●	●	●
REPLACEMENT OUTAGE	○	●	●	●	●	●	●

● in scope ○ when the outage includes feed-pump or MV work

SW-3X1 MODEL · CONCEPTUAL ILLUSTRATION, NOT ENGINEERED · QUANTITIES FROM THE MODEL'S CABLE SCHEDULE

HRSG 3: an HP evaporator module lifted out through the opened roof by a crawler crane; the new module waits on a lowboy on the ring road.

BOILER SOLUTIONS · REPLACEMENT

THE OUTAGE CLOCK IS THE COST

On a boiler or HRSG replacement every hour of the outage costs. Cable rides the same window, so it moves off the critical path.

- **STAGE BEFORE THE TRIP** cut-to-length reels on SIMpull Cradles and reel rollers, labelled per pull, at the unit before the outage starts
- **PRE-TERMINATE** factory-made harnesses with QR tags land on the marshalling boxes: test, not terminate, on the critical path
- **PULL CLEAN** SIMpull reels and a sheave at the HRSG wall: one crew, no reel jacks, tension recorded
- **CUT BACK AND RECYCLE** old cable segregated into recycling bins as the module comes out
- **CONVERSIONS** new burner management and gas trains in Class I Div 2 run in ARMOR-X MC-HL




Cable work at the HRSG e-house




Old module on the hook

stephan.hardt@southwire.com


THE CABLE AT EVERY SPOT

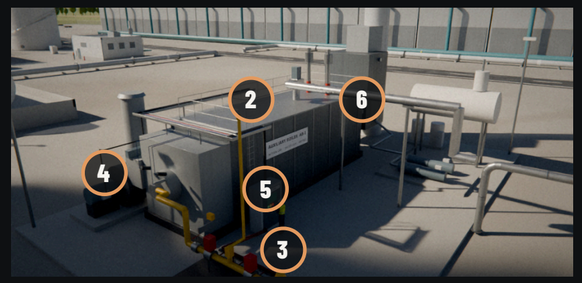

Package boiler AB-1

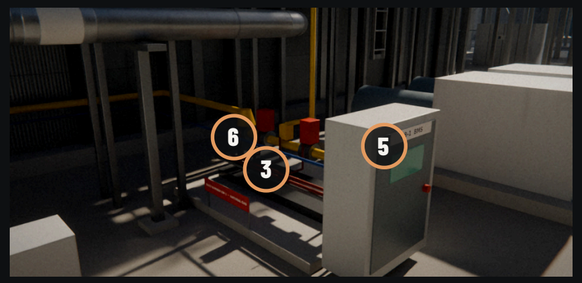

HRSG duct-burner skid

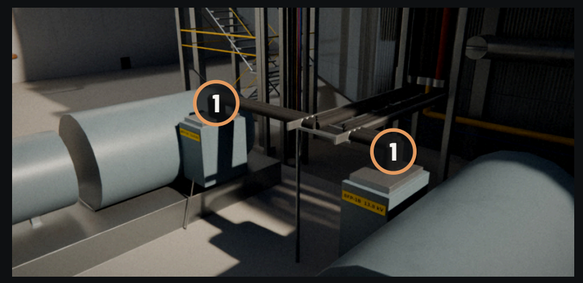

HRSG feed pumps, 13.8 kV



Outage cable work, HRSG 3

	PRODUCT	WHERE IT RUNS	SPEC	SOUTHWIRE STOCK # · SIZE	SPEC SHEET
1	**MV-105 15 KV** 1/C Cu, 220 mil NL-EPR 133 %, tape shield, SIMpull PVC	Feed-pump motors, 13.8 kV	46302	95604599 · 500 kcmil	southwire.com ›
2	**TYPE TC-ER POWER** 3/C Cu XHHW-2 + ground, PVC, 600 V	Fans, pumps, MCC feeders	45252	95305999 · 12 AWG 3/C	southwire.com ›
3	**ARMOR-X MC-HL** Cu XLPE XHHW-2, welded armor, PVC, 600 V, Class I Div 2	Gas trains, burner skids	45352	89052799 · 8 AWG 4/C	southwire.com ›
4	**ARMOR-X MC-HL VFD** 3/C Cu XLPE XHHW-2 + ground, VFD rated	FD fan on its drive	45352	89051899 · 3/0 3/C	southwire.com ›
5	**CONTROL TC-ER** Cu XLPE XHHW-2, 600 V	BMS panels, valves, MOVs	45053	89067701 · 14 AWG 5/C	southwire.com ›
6	**INSTRUMENTATION PLTC / ITC** 300 V, shielded pairs + overall shield (SPOS)	Flame scanners, drum level, transmitters	43303	per pair count	southwire.com ›
7	**THERMOCOUPLE EXTENSION** PVC, PLTC multi-pair (KX on request), 105 °C	HRSG gas-path and tube temperatures	42345	per construction	cabletechsupport.southwire.com ›
8	**SIMPULL CRADLE** for 51 / 61 in SIMpull Reels, one-person payoff	Outage staging and pulls	SPR-CRDL	67606001	southwire.com ›

Stock numbers are one catalogue size per product, from Southwire's product listings; every size and construction is on the same SPEC. Confirm current stock with Southwire customer service before quoting.

stephan.hardt@southwire.com