
BOILERS: GREENFIELD & BROWNFIELD

One cable partner from the new HRSG to the package boiler to the outage that replaces a module: the same products, staged and pulled the same way.

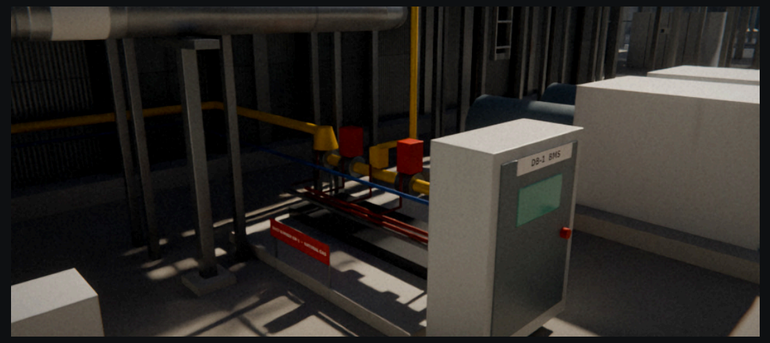

01 · GREENFIELD

HEAT-RECOVERY BOILER

Behind every gas turbine: three-pressure HRSG with SCR and a duct burner. Feed pumps at 13.8 kV, drum-level and thermocouple runs, burner management in a Class I Div 2 skid.

705
CABLES PER HRSG TRAIN

156,000
FT OF CABLE PER TRAIN



02 · GREENFIELD OR RETROFIT

GAS-FIRED PACKAGE BOILER

The plant's auxiliary boiler, the same package sold to industry: burner and BMS, gas train with double block and bleed, FD fan on a VFD, feedwater pumps, its own MCC e-house.

83
CABLES PER PACKAGE BOILER

42,000
FT OF CABLE



03 · BROWNFIELD

MODULE REPLACEMENT OUTAGE

An HP evaporator module lifted out through the opened roof. The cable work rides the same outage window, so it has to be staged, pre-terminated and pulled fast.

Outage
CRITICAL PATH

SIMpull
+ PRE-TERMINATED HARNESSES

CABLE BY BOILER TYPE

	MV-105 15 KV FEED PUMPS	TC-ER 600 V POWER & VFD	ARMOR-X MC-HL GAS TRAINS (C1D2)	CONTROL TC-ER	INSTRUMENTATION PLTC · TC EXT.	SIMPULL · REEL ROLLERS	PRE-TERMINATED HARNESSES
HRSG + DUCT BURNER	●	●	●	●	●	●	●
PACKAGE BOILER		●	●	●	●	●	●
REPLACEMENT OUTAGE	○	●	●	●	●	●	●

● in scope ○ when the outage includes feed-pump or MV work

SW-3X1 MODEL · CONCEPTUAL ILLUSTRATION, NOT ENGINEERED · QUANTITIES FROM THE MODEL'S CABLE SCHEDULE

HRSG 3: an HP evaporator module lifted out through the opened roof by a crawler crane; the new module waits on a lowboy on the ring road.

BOILER SOLUTIONS · REPLACEMENT

THE OUTAGE CLOCK IS THE COST

On a boiler or HRSG replacement every hour of the outage costs. Cable rides the same window, so it moves off the critical path.

- **STAGE BEFORE THE TRIP** cut-to-length reels on SIMpull Cradles and reel rollers, labelled per pull, at the unit before the outage starts
- **PRE-TERMINATE** factory-made harnesses with QR tags land on the marshalling boxes: test, not terminate, on the critical path
- **PULL CLEAN** SIMpull reels and a sheave at the HRSG wall: one crew, no reel jacks, tension recorded
- **CUT BACK AND RECYCLE** old cable segregated into recycling bins as the module comes out
- **CONVERSIONS** new burner management and gas trains in Class I Div 2 run in ARMOR-X MC-HL



Cable work at the HRSG e-house



Old module on the hook

stephan.hardt@southwire.com